

LIGHTSOURCE

**\_essentials**

# It all started with Arthur Brown...



A fisherman who, in his own words “saw the light” and opened Northern Ireland’s first commercial lighting showroom back in the ‘80s.

His two sons, Richard and Anthony, grew up being quizzed everywhere they went on what type of light was above them. As a result, neither one ever ventured too far from the lighting world.

Richard, an avid traveller and a bit of a geek, got a degree in computer science from the University of Edinburgh, and then moved to the Alps where he

started an e-commerce business selling lights.

Anthony headed to the US to do youthwork, only to realise he likes lights more than he likes other people’s children, so he returned to the family business. He learned more than a healthy amount about bulbs, and became an expert in the industry.

When the time came for Arthur to retire, the two sons joined forces and in 2014, Lightsource was born - a project lighting business with an e-commerce wing.

- About ..... 6
- Portfolio ..... 10
- Ceiling Lights ..... 18
- LED Strip ..... 38
- Profiles ..... 56
- Track Systems ..... 64
- Wall Lights ..... 82
- Step Lights ..... 92
- Exterior Lights ..... 102
- Dimming Systems ..... 110
- Accessories ..... 120



The  
Engine  
Room

LIGHTSOURCE

Lightsource, your lighting project partner.

Let our consultants guide you through the design, selection and supply of the perfect lighting solution for your space.



**9**

YEARS OF BUSINESS



**77**

COUNTRIES SUPPLIED



**21**

TEAM MEMBERS



**160**

BRAND PARTNERSHIPS




**535K**

LIGHTS DELIVERED




**20K**

PROJECTS COMPLETED

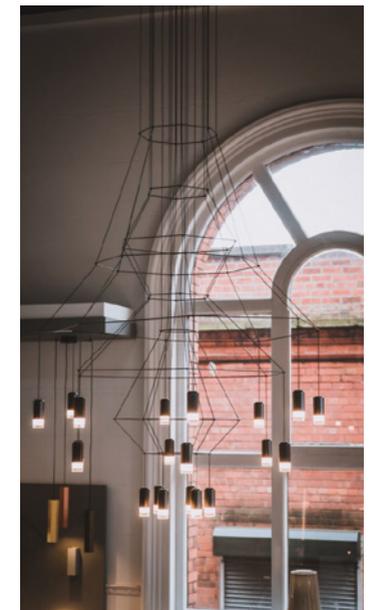

**The Engine Room**

Uniquely located in a historic East Belfast linen mill, our showroom displays the latest decorative and architectural lighting trends and technologies.

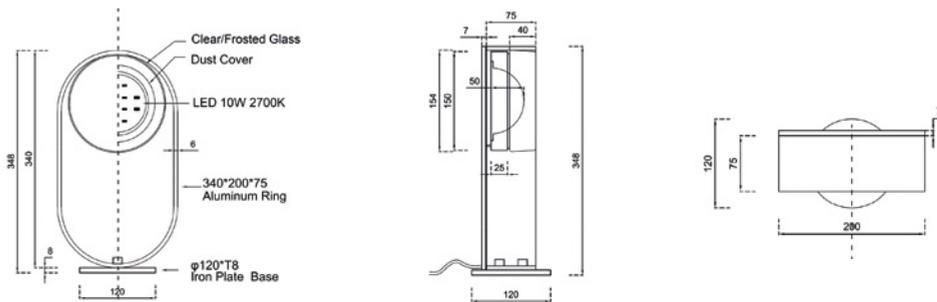

Our engineers have partnered with a selection of factories and artisans to enable us to develop a wide range of custom lighting. Get in touch to see how we can help you create your vision.

Our design consultants can help at any level from a casual conversation regarding product choice and placement, to a full lighting design service, including plans, lux levels, CAD drawings and 3D renderings.




Hawksmoor Restaurant, Glasgow.



Private home, Qatar.



Carton house and golf resort, Ireland.

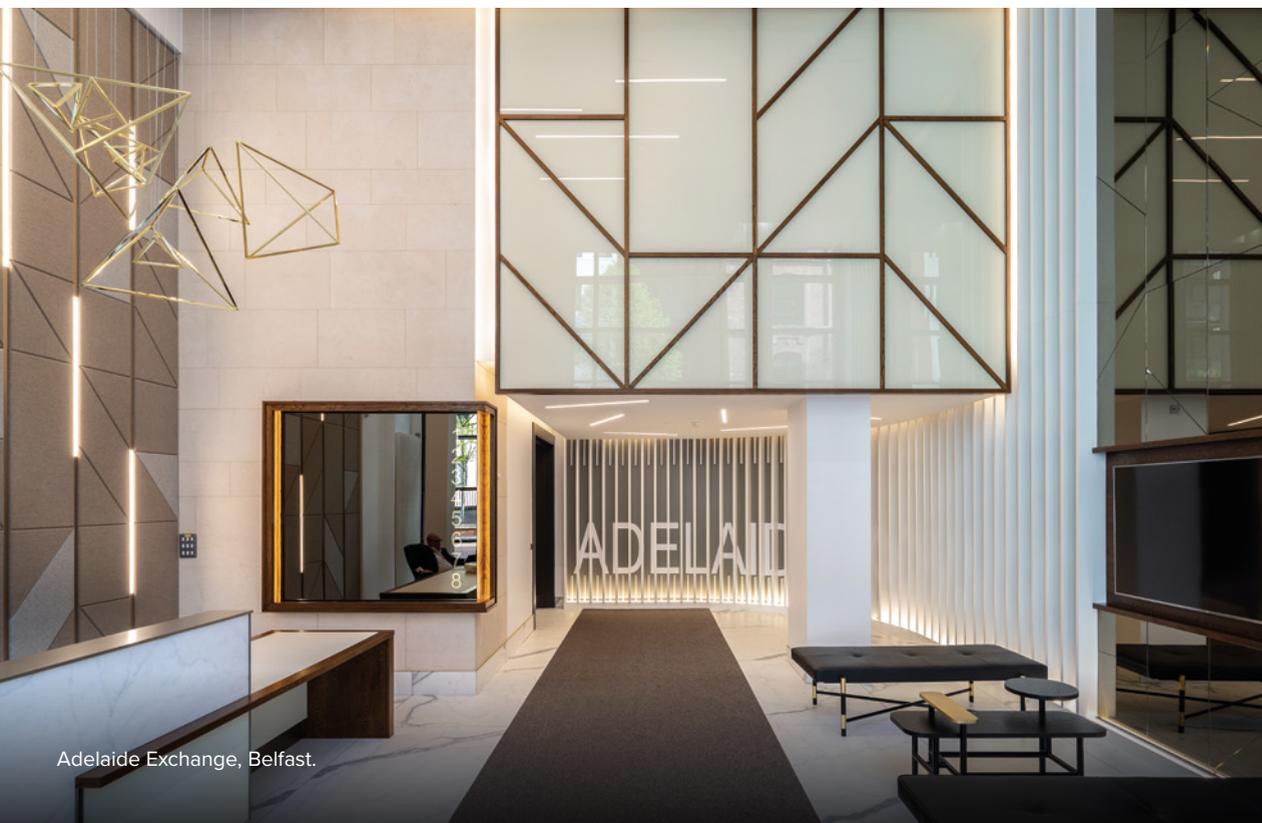

Adelaide Exchange, Belfast.




Private home, Belfast.




Hinch Distillery, Northern Ireland.



FX Building, Belfast.

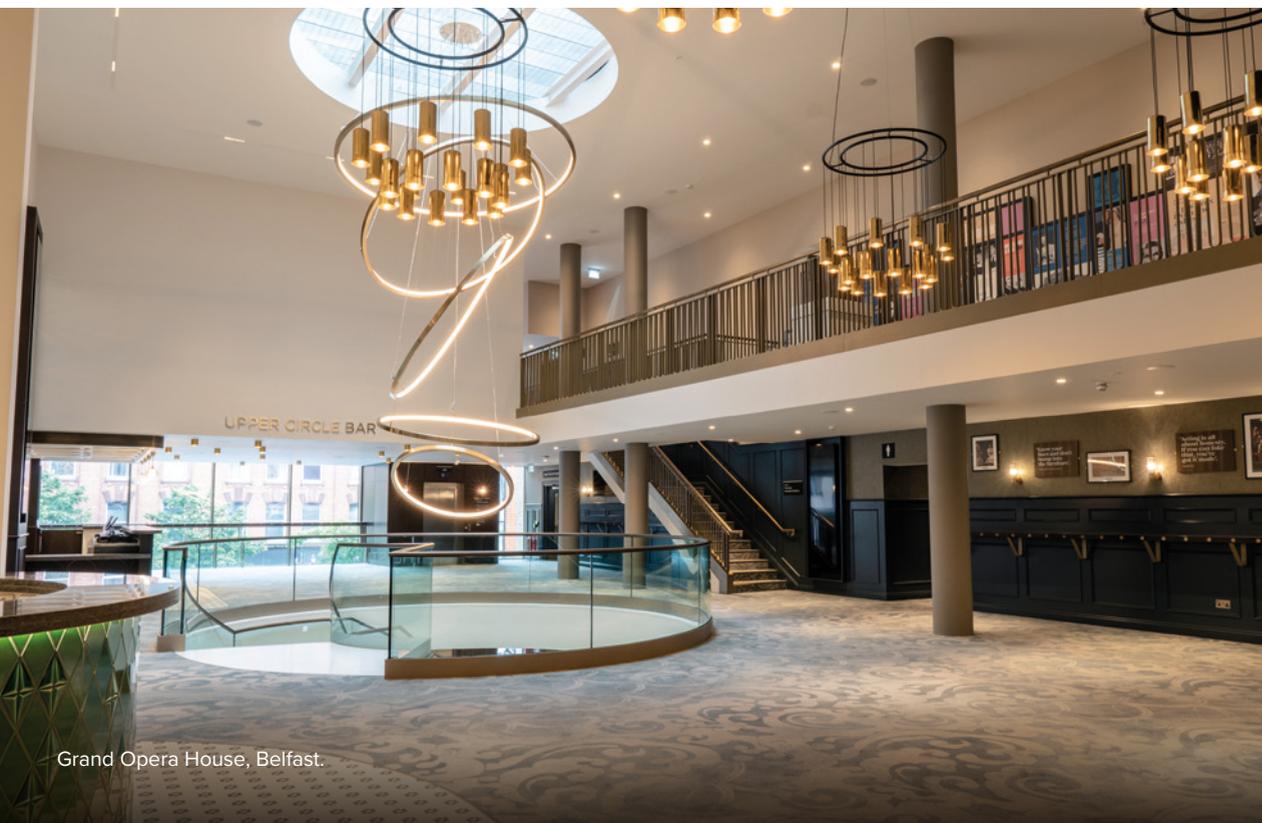

Grand Opera House, Belfast.

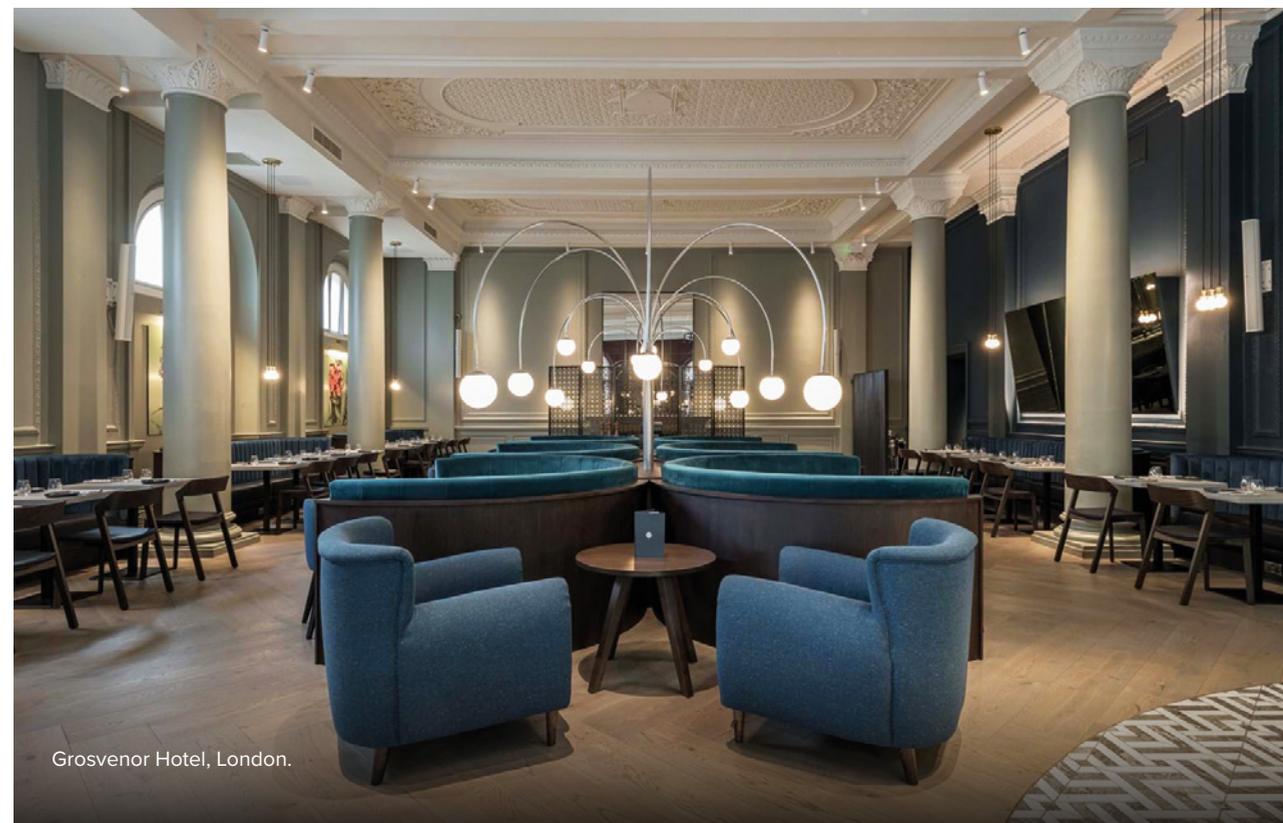


Grosvenor Hotel, London.




VW Showroom, Belfast.



Ciao Gelato Bar, Northern Ireland.

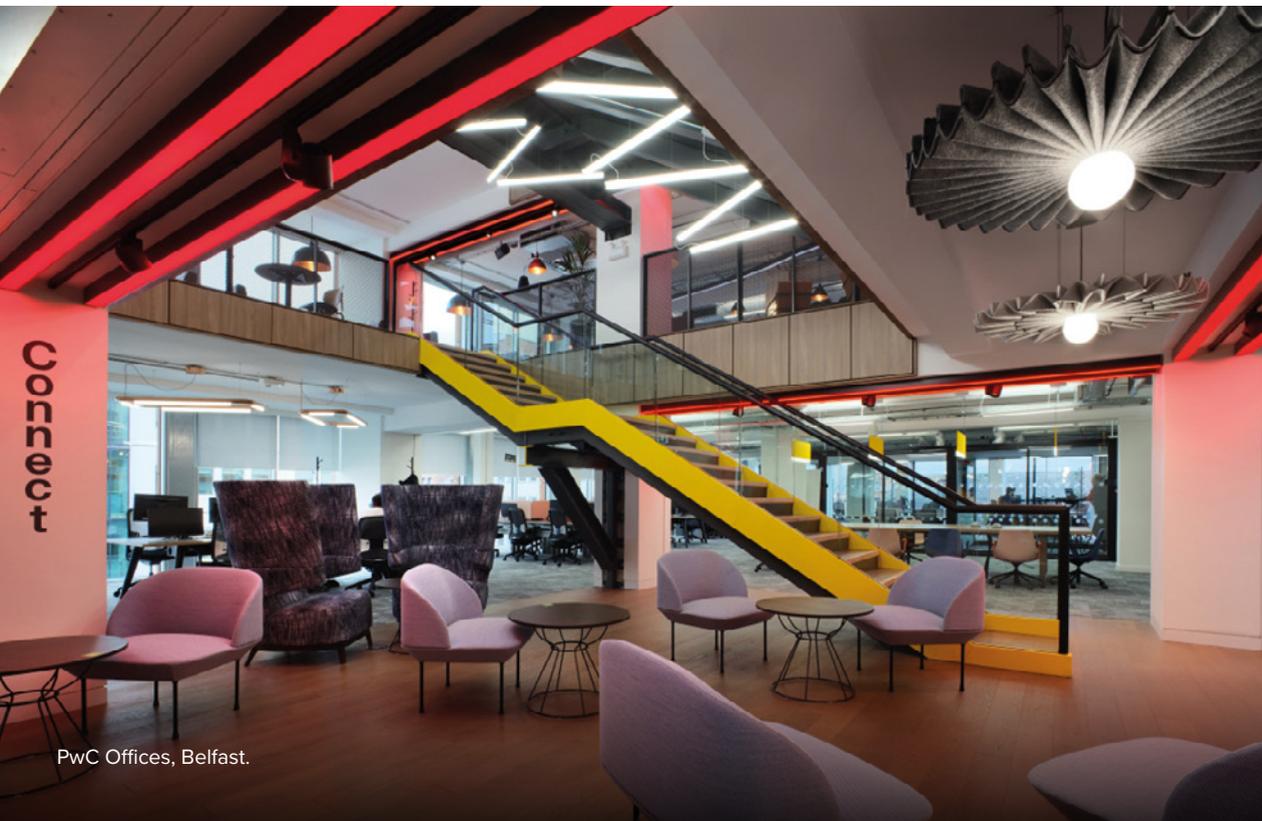


PwC Offices, Belfast.

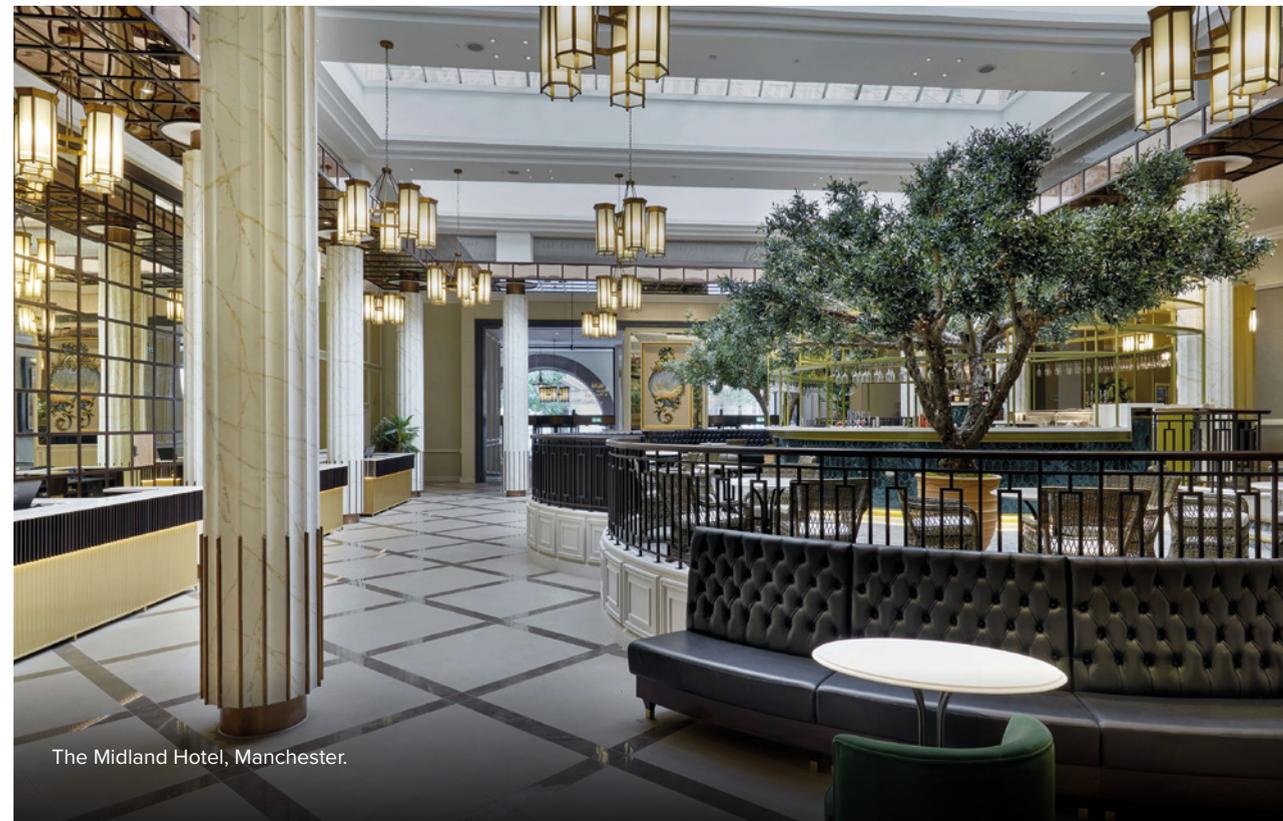


The Midland Hotel, Manchester.



Grand Opera House, Belfast.

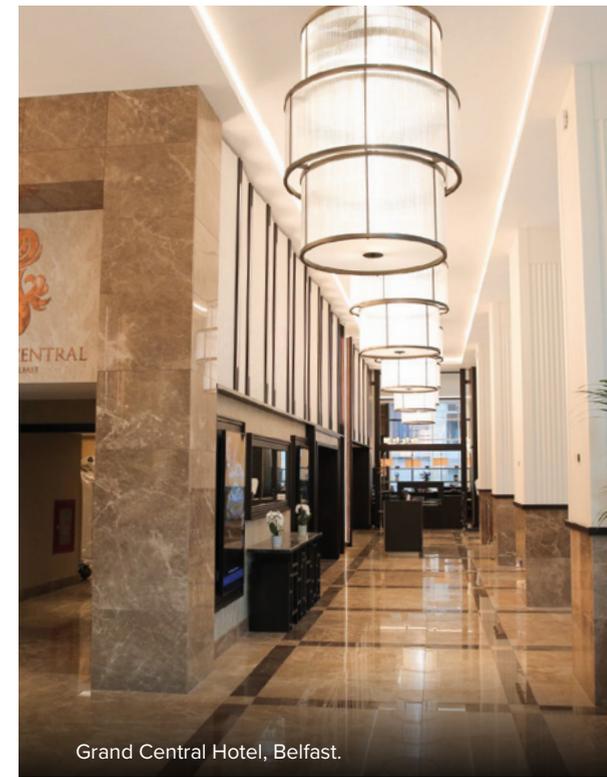


Grand Central Hotel, Belfast.

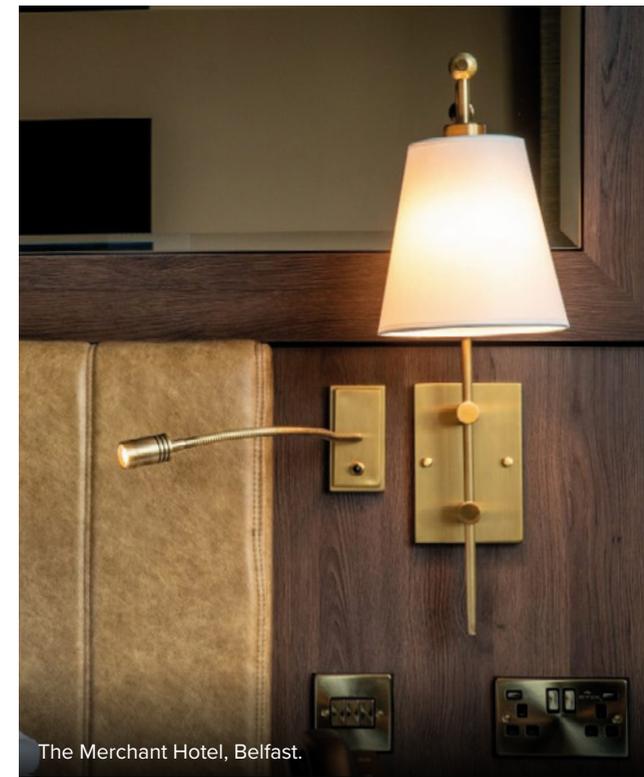

The Merchant Hotel, Belfast.



Herbert Smith Freehills Offices, Belfast.

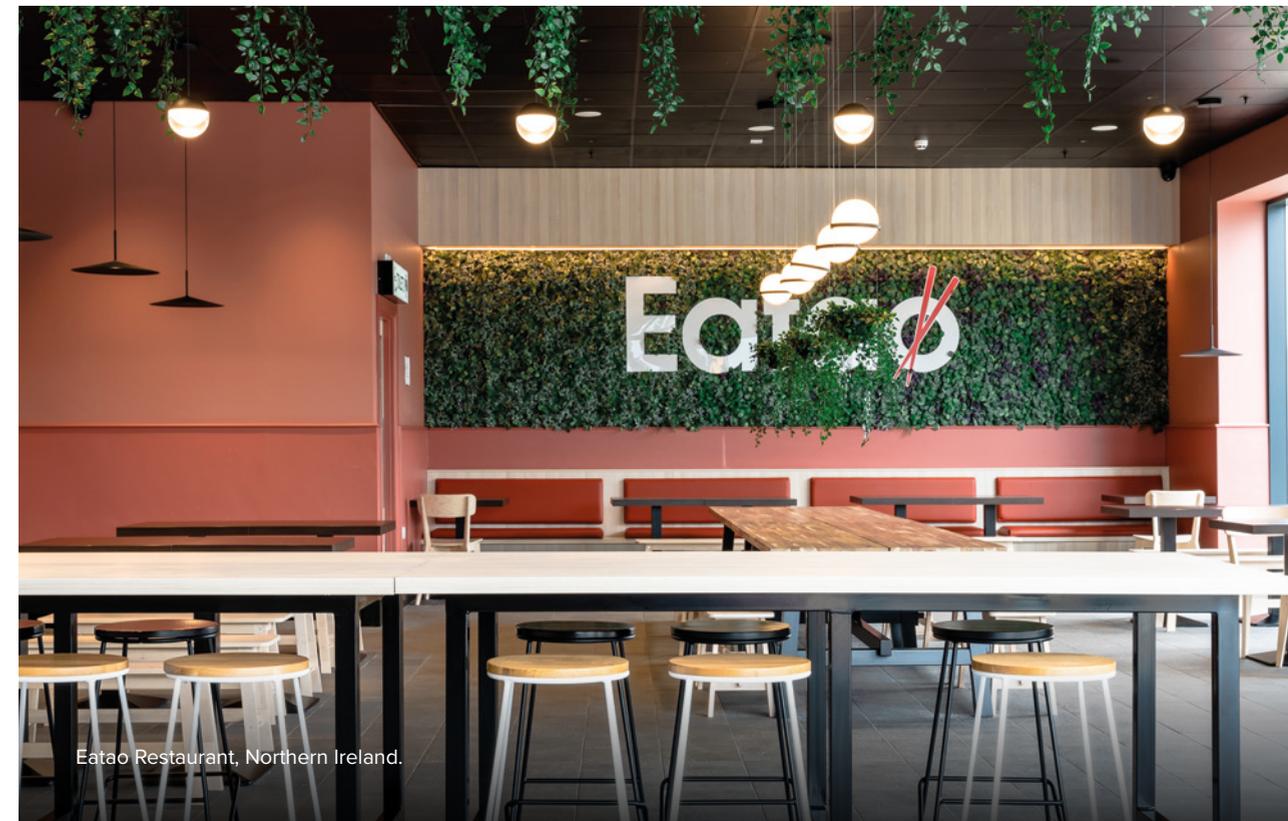

Eatco Restaurant, Northern Ireland.

# Ceiling Lights



# Meta



Discrete in size with minimal trim and low glare, this pinhole downlight is perfect for providing accent lighting. It is IP54, so can also be used in wet environments.

**Application:** Bathroom zones 1 and 2, alcoves, door lights, feature walls, toilet cubicles.

UKCA CE 5 YEARS IP54 CRI90 LDT

**Wattage** 5.6W  
**Lumen output** 395 lm  
**Beam angle\*** 32°  
**Colour temp\*** 3000K  
**CRI** 90  
**IP rating** IP54  
**Cut-out size** 45mm  
**Warranty** 5 years  
**Dimmable** No  
**Driver included** Remote  
**Driver type** Constant current  
**Light source** Integrated LED

\*Other options available upon request

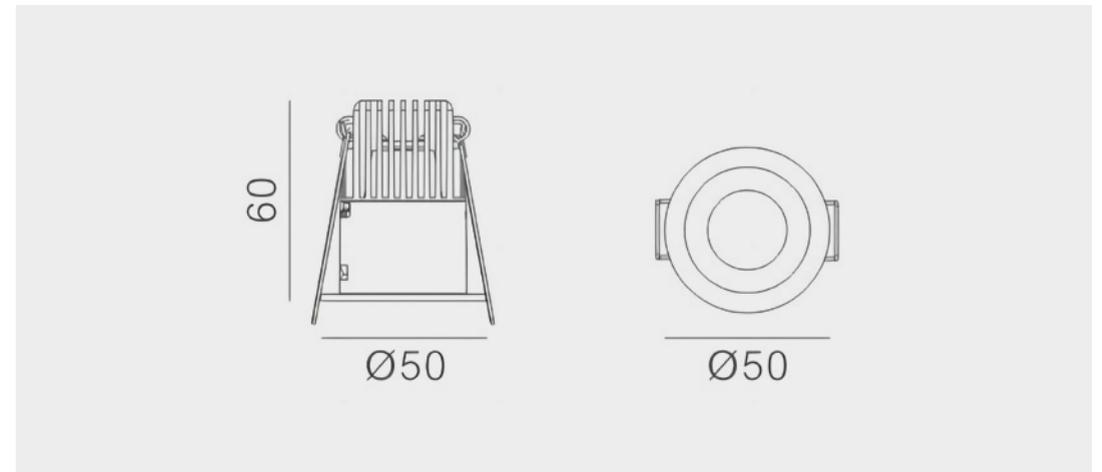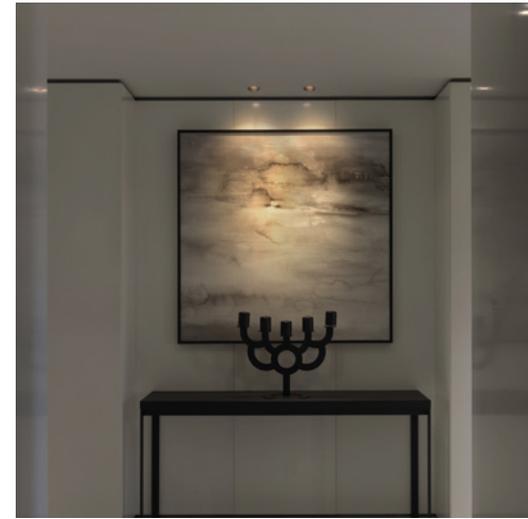

## META

COLOUR	CODE
White	3029768
Black	3015809

# Pebuk


This clean-looking cylindrical surface light is low-glare, IP54, with a medium light output. It's a great modern, everyday solution for lighting with surface-mounted downlights.

**Application:** Corridors, general surface.

UKCA CE 5 YEARS IP54 CRI90 LDT

<b>Wattage</b>	18W
<b>Lumen output</b>	1087 lm
<b>Beam angle*</b>	36°
<b>Colour temp*</b>	3000K
<b>CRI</b>	90
<b>IP rating</b>	IP54
<b>Warranty</b>	5 years
<b>Dimmable</b>	Phase dim
<b>Driver included</b>	Integrated
<b>Driver type</b>	Constant current
<b>Light source</b>	Integrated LED

\*Other options available upon request

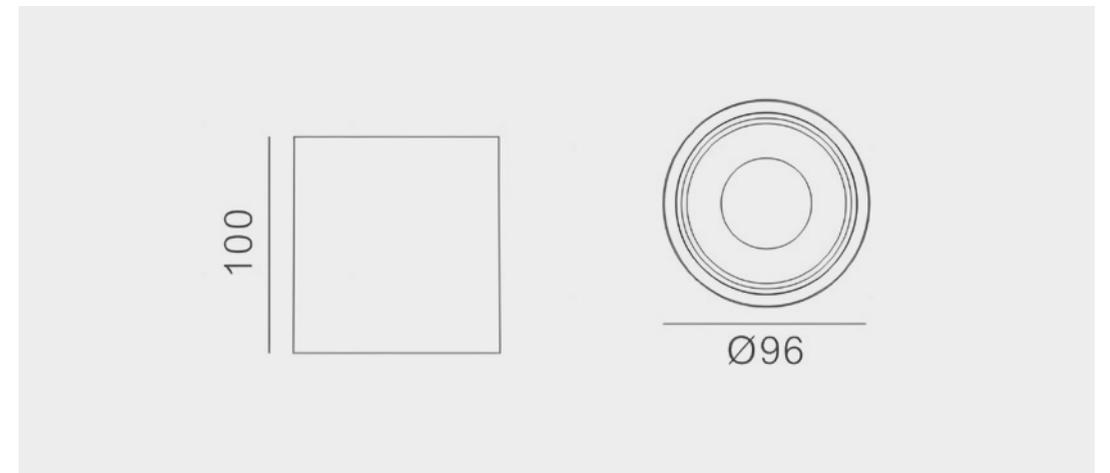

## PEBUK

COLOUR	CODE
White Outer/Black inner	3017304
Black Outer/Black Inner	3024078

# Turn ON


This adjustable spotlight can be rotated to a max tilt of 90 degrees. Its unique, architectural design makes it a customer favourite for highlighting art and signs.

**Application:** Sloped ceilings, residential, hospitality.

UKCA CE 5 YEARS IP20 CRI90 LDT

<b>Wattage</b>	8.5W
<b>Lumen output</b>	670 lm
<b>Beam angle*</b>	38°
<b>Colour temp*</b>	3000K
<b>CRI</b>	90
<b>IP rating</b>	IP20
<b>Warranty</b>	5 years
<b>Tilt</b>	Max 90°
<b>Dimmable</b>	Phase dim
<b>Driver included</b>	Integrated
<b>Driver type</b>	Constant current
<b>Light source</b>	Integrated LED

\*Other options available upon request

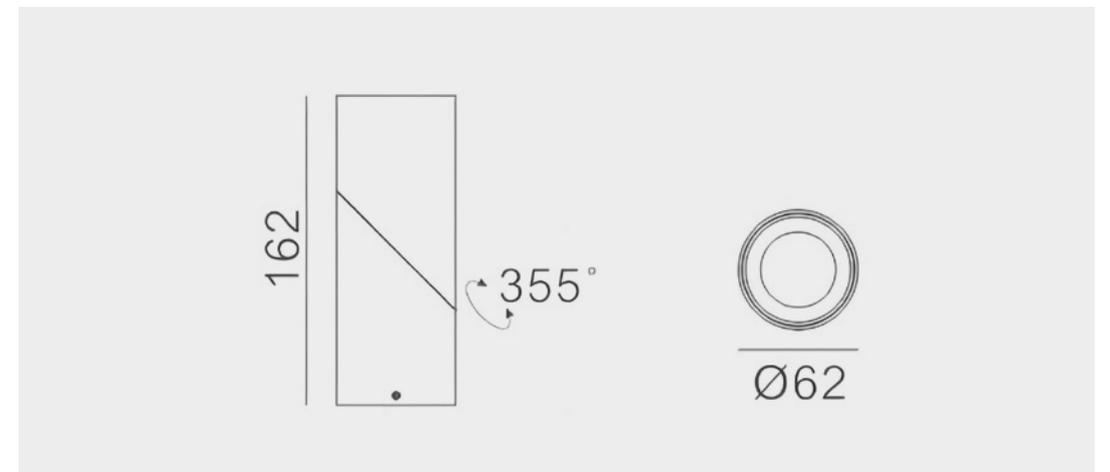

## TURN ON

COLOUR	CODE
White Outer/Black inner	3026776
Black Outer/Black Inner	3028471


# Top Surface

This surface mounted light can be easily installed with a variety of GU10 lamps to suit output requirements, dimming systems, and favourite colour temperatures. The lamp is recessed back into the fitting to reduce glare.

**Application:** Coffee shops, shops, and small residential.

<b>IP Rating</b>	IP20
<b>Warranty</b>	5 years
<b>Dimmable</b>	Yes
<b>Diameter</b>	54mm
<b>Height</b>	110mm
<b>Warranty</b>	5 Years
<b>Light source</b>	GU10
<b>Driver included</b>	No

UKCA CE 5 YEARS IP20

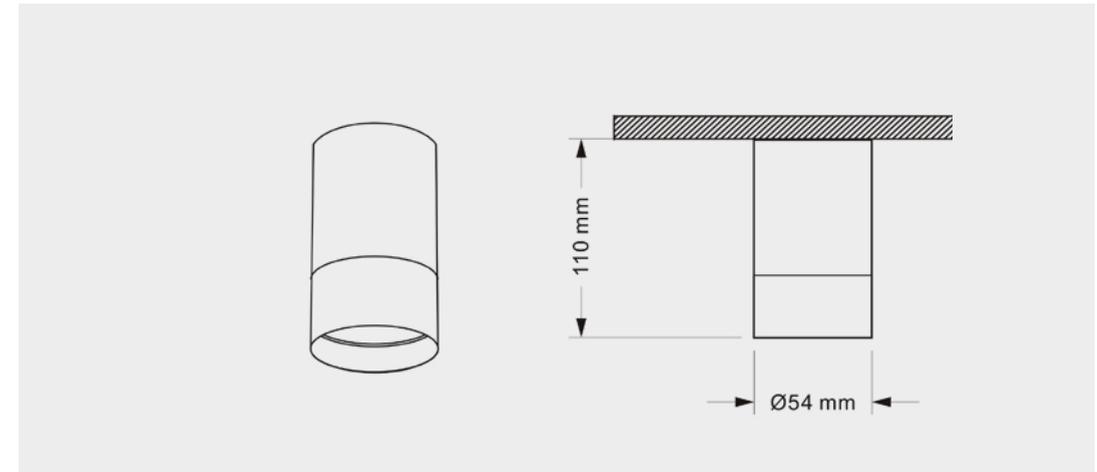

## RECOMMENDED LAMPS

COLOUR TEMP	BEAM ANGLE	LUMENS	CODE
2700K	60°	550lm	3034895
3000K	60°	550lm	3034896

## TOP SURFACE

COLOUR	CODE
White	3034999
Black	3035000

# Favor IN


A semi-recessed spotlight that can be rotated and tilted after installation, providing flexibility of use.

**Application:** Pitched ceilings, highlighting art, residential, hospitality.

UKCA CE 5 YEARS IP20 CRI90 LDT

<b>Wattage</b>	16.6W
<b>Lumen output</b>	537 lm
<b>Beam angle*</b>	38°
<b>Colour temp*</b>	3000K
<b>CRI</b>	90
<b>IP rating</b>	IP20
<b>Cut-out size</b>	50mm
<b>Warranty</b>	5 years
<b>Dimmable</b>	Phase dim
<b>Driver included</b>	Remote
<b>Driver type</b>	Constant current
<b>Light source</b>	Integrated LED

\*Other options available upon request

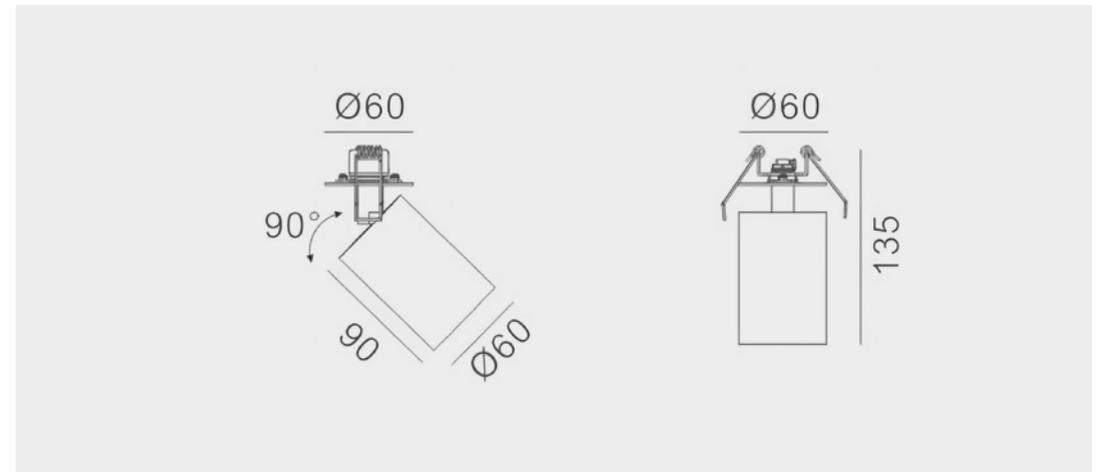

**FAVOR IN**

**COLOUR**

White

**CODE**

3026778

# Arti Fixed



The fixed Arti is available with a replaceable LED Engine, or with a GU10 lamp. It is designed with low-glare in mind, and suitable in most applications. Its different finishes, control options, and outputs make it highly versatile.

**Application:** Corridors, general lighting, residential, commercial.

- IP20
- CRI90
- 7 YEARS
- CE
- UKCA
- LDT

- Beam angle\*** 40°
- Colour temp\*** 2700K  
3000K  
4000K  
1800K-2700K
- Wattage** 12.5W
- Cut-out** 68mm
- CRI** 90
- IP rating** IP20
- Warranty†** 7 years
- Dimmable** Phase dim, DALI2
- Driver type** Constant current
- Light source** GU10 Lamp  
LED Engine
- Driver included** No

\* Other options available on request.  
† Only with our LED engine & driver, otherwise 2 years.

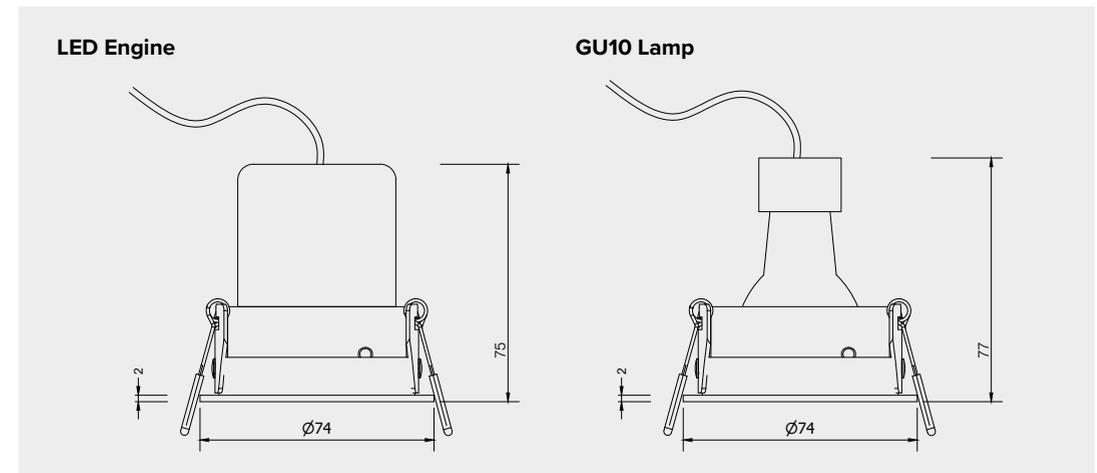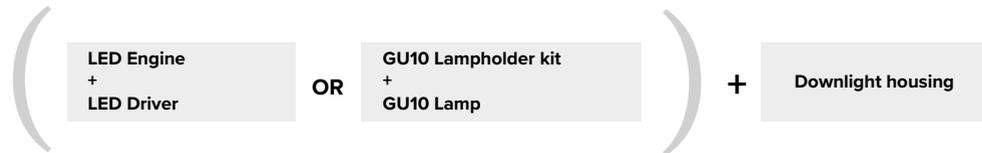

### LED ENGINE (You must also choose a LED Driver):

COLOUR TEMP	LUMEN OUTPUT	EFFICACY	BEAM ANGLE	WATTAGE	CRI	CODE
2700K	1000 lm	94 lm/W	40°	12.5W	90	3034889
3000K	1050 lm	99 lm/W	40°	12.5W	90	3034887
4000K	1100 lm	104 lm/W	40°	12.5W	90	3034891
1800-2700K	940 lm	77 lm/W	40°	12.5W	90	3035017

### LED DRIVER

WATTAGE	CONTROL	CODE
14W	Mains Dimmable	3037088
20W	DALI	3037089

### GU10 LAMP (Choose the Lampholder Kit and a lamp):

LAMPHOLDER KIT & LAMP	CODE
GU10 Lampholder Kit	3035008
GU10 Lamp, 2700K, 8.3W, 550lm, 60°	3034895
GU10 Lamp, 3000K, 8.3W, 550lm, 60°	3034896

### DOWNLIGHT HOUSING

COLOUR	CODE
White Outer, Black Inner	3034395
White Outer, White Inner	3035001
Black Outer, Black Inner	3035002

# Arti IP65



This downlight's IP65 rating means that it can be installed above showers, wetrooms, and most other damp environments. Available with a replaceable LED Engine or with a GU10 lamp, its identical appearance to the other fittings in this collection means that it seamlessly ties in with the look of the rest of the project.

**Application:** Bathrooms, wetrooms.

IP65 CRI90 7 YEARS CE UKCA LDT

<b>Wattage</b>	12.5W
<b>Beam angle*</b>	40°
<b>Colour temp*</b>	2700K 3000K 4000K 1800K-2700K
<b>Cut-out</b>	68mm
<b>CRI</b>	90
<b>IP rating</b>	IP65
<b>Warranty†</b>	7 years
<b>Dimmable</b>	Phase dim, DALI2
<b>Driver type</b>	Constant current
<b>Light source</b>	GU10 Lamp LED Engine
<b>Driver included</b>	No

\* Other options available on request.  
† Only with our LED engine & driver, otherwise 2 years.

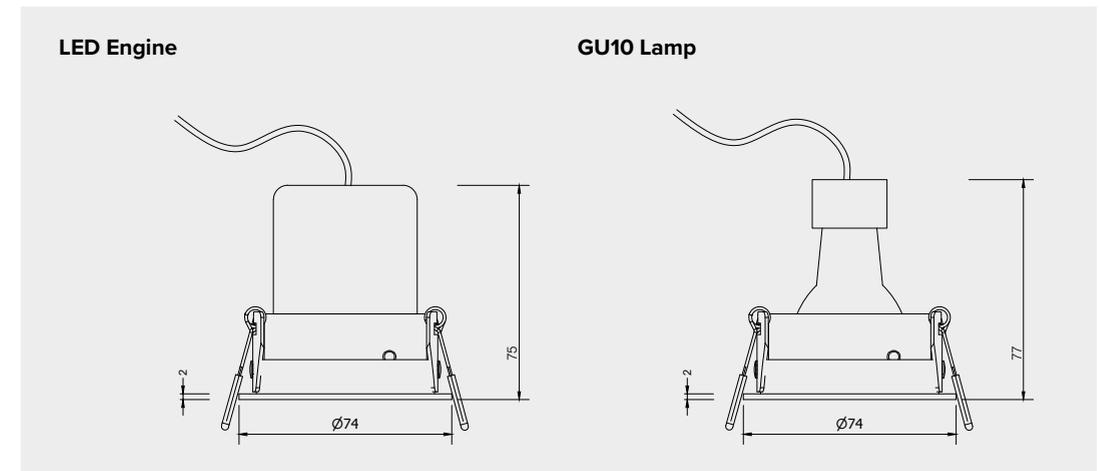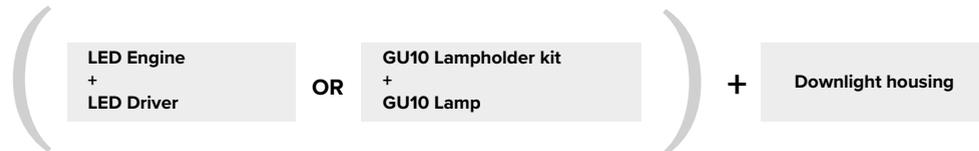

### LED ENGINE (You must also choose a LED Driver):

COLOUR TEMP	LUMEN OUTPUT	EFFICACY	BEAM ANGLE	WATTAGE	CRI	CODE
2700K	1000 lm	94 lm/W	40°	12.5W	90	3034889
3000K	1050 lm	99 lm/W	40°	12.5W	90	3034887
4000K	1100 lm	104 lm/W	40°	12.5W	90	3034891
1800-2700K	940 lm	77 lm/W	40°	12.5W	90	3035017

### LED DRIVER

WATTAGE	CONTROL	CODE
14W	Mains Dimmable	3037088
20W	DALI	3037089

### GU10 LAMP (Choose the Lampholder Kit and a lamp):

LAMPHOLDER KIT & LAMP	CODE
GU10 Lampholder Kit	3035008
GU10 Lamp, 2700K, 8.3W, 550lm, 60°	3034895
GU10 Lamp, 3000K, 8.3W, 550lm, 60°	3034896

### DOWNLIGHT HOUSING

COLOUR	CODE
White Outer, Black Inner	3035004
White Outer, White Inner	3035003
Black Outer, Black Inner	3039013

# Arti Adjustable


A tilt of 40° in this fitting allows precision in projecting the light to where it is needed. Available with a replaceable LED Engine or with a GU10 lamp. It is great for highlighting art or providing accurate task lighting on worktops or reading nooks.

**Application:** Kitchens, artwork, commercial, residential.

- IP20
- CRI90
- 7 YEARS
- CE
- UKCA
- LDT

<b>Wattage</b>	12.5W
<b>Beam angle*</b>	40°
<b>Colour temp*</b>	2700K 3000K 4000K 1800K-2700K
<b>Cut-out</b>	68mm
<b>CRI</b>	90
<b>IP rating</b>	IP20
<b>Warranty†</b>	7 years
<b>Tilt</b>	30°
<b>Dimmable</b>	Phase dim, DALI2
<b>Driver type</b>	Constant current
<b>Light source</b>	GU10 Lamp LED Engine
<b>Driver included</b>	No

\* Other options available on request.  
† Only with our LED engine & driver, otherwise 2 years.

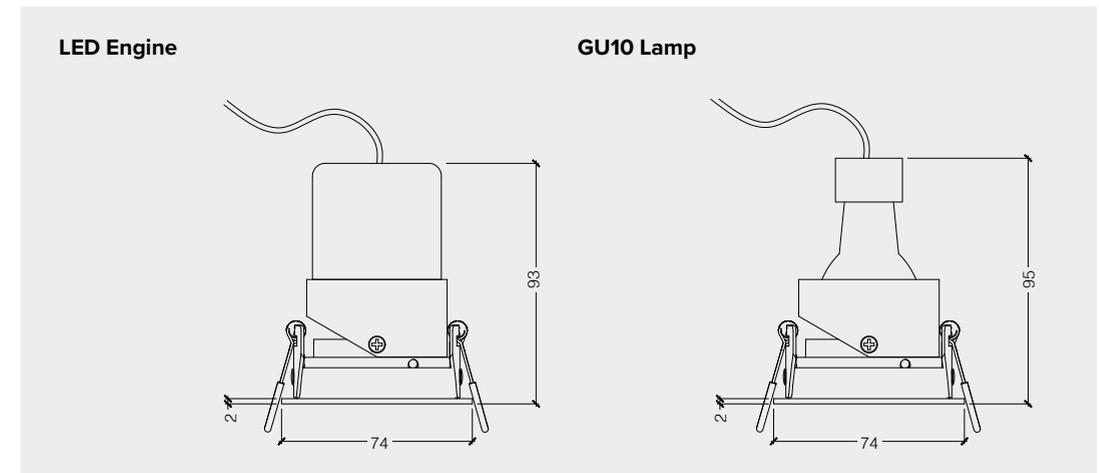

## LED ENGINE (You must also choose a LED Driver):

COLOUR TEMP	LUMEN OUTPUT	EFFICACY	BEAM ANGLE	WATTAGE	CRI	CODE
2700K	1000 lm	94 lm/W	40°	12.5W	90	3034889
3000K	1050 lm	99 lm/W	40°	12.5W	90	3034887
4000K	1100 lm	104 lm/W	40°	12.5W	90	3034891
1800-2700K	940 lm	77 lm/W	40°	12.5W	90	3035017

## LED DRIVER

WATTAGE	CONTROL	CODE
14W	Mains Dimmable	3037088
20W	DALI	3037089

## GU10 LAMP (Choose the Lampholder Kit and a lamp):

LAMPHOLDER KIT & LAMP	CODE
GU10 Lampholder Kit	3035008
GU10 Lamp, 2700K, 8.3W, 550lm, 60°	3034895
GU10 Lamp, 3000K, 8.3W, 550lm, 60°	3034896

## DOWNLIGHT HOUSING

COLOUR	CODE
White Outer, Black Inner	3035006
White Outer, White Inner	3035005
Black Outer, Black Inner	3035429

# Arti Trimless



This adjustable fitting is plastered into ceilings, becoming discreet and seamless once installed. Available with both a replaceable LED Engine or a GU10 lamp. It has a recessed light source ensuring a low glare output.

**Application:** Kitchens, artwork, commercial and residential.

IP20 CRI90 7 YEARS CE UKCA LDT

<b>Wattage</b>	8.5W
<b>Beam angle*</b>	40°
<b>Colour temp*</b>	2700K 3000K 4000K 1800K-2700K
<b>Cut-out</b>	68mm
<b>Tilt</b>	30°
<b>CRI</b>	90
<b>IP rating</b>	IP20
<b>Warranty†</b>	7 years
<b>Dimmable</b>	Phase dim, DALI2
<b>Driver type</b>	Constant current
<b>Light source</b>	GU10 Lamp LED Engine
<b>Driver included</b>	No

\* Other options available on request.  
† Only with our LED engine & driver, otherwise 2 years.

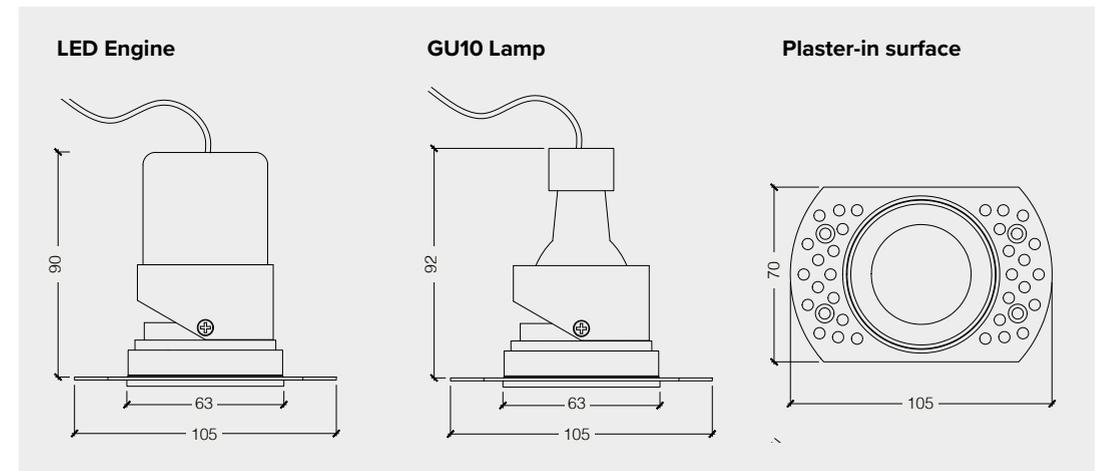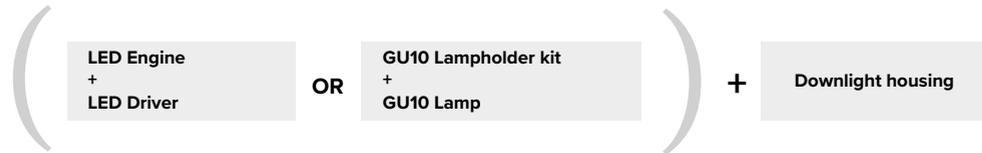

## LED ENGINE (You must also choose a LED Driver):

COLOUR TEMP	LUMEN OUTPUT	EFFICACY	BEAM ANGLE	WATTAGE	CRI	CODE
2700K	1000 lm	94 lm/W	40°	12.5W	90	3034889
3000K	1050 lm	99 lm/W	40°	12.5W	90	3034887
4000K	1100 lm	104 lm/W	40°	12.5W	90	3034891
1800-2700K	940 lm	77 lm/W	40°	12.5W	90	3035017

## LED DRIVER


WATTAGE	CONTROL	CODE
14W	Mains Dimmable	3037088
20W	DALI	3037089

## GU10 LAMP

LAMPHOLDER KIT & LAMP	CODE
GU10 Lampholder Kit	3035008
GU10 Lamp, 2700K, 8.3W, 550lm, 60°	3034895
GU10 Lamp, 3000K, 8.3W, 550lm, 60°	3034896

## DOWNLIGHT HOUSING

COLOUR	CODE
Black	3034237
White	3035007

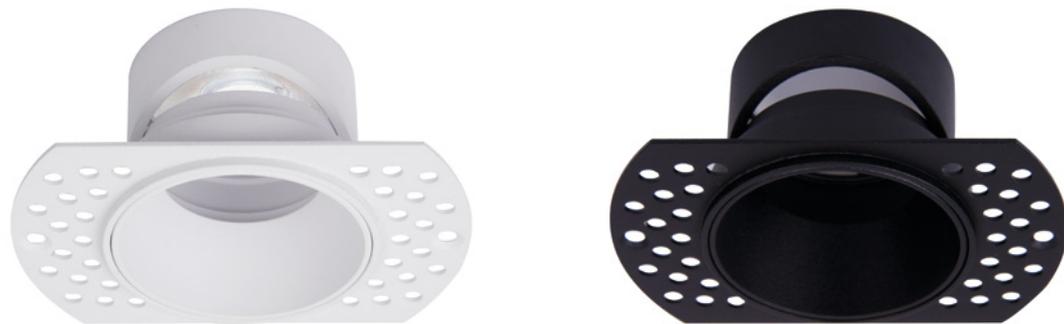

# LED Strip



# Seamless Series



This innovative, dotless LED strip provides a continuous glow of light with no visible diodes or hotspots. With a CRI of 90 the quality of the light emitted is of a very high standard.

**Application:** Furniture detail, coffers, shelving.

UKCA CE 3 YEARS IP20 CRI90 LDT

<b>Voltage</b>	24V
<b>Wattage</b>	9W/m
<b>CRI</b>	90
<b>LED/m</b>	Continuous
<b>IP rating</b>	IP20
<b>Length</b>	5m
<b>Cutting length</b>	25mm
<b>Copper thickness</b>	2oz
<b>Warranty</b>	3 years
<b>Colour temp*</b>	2700K 3000K 4000K
<b>Driver type</b>	Constant voltage
<b>Driver included</b>	No

\*Other options available upon request

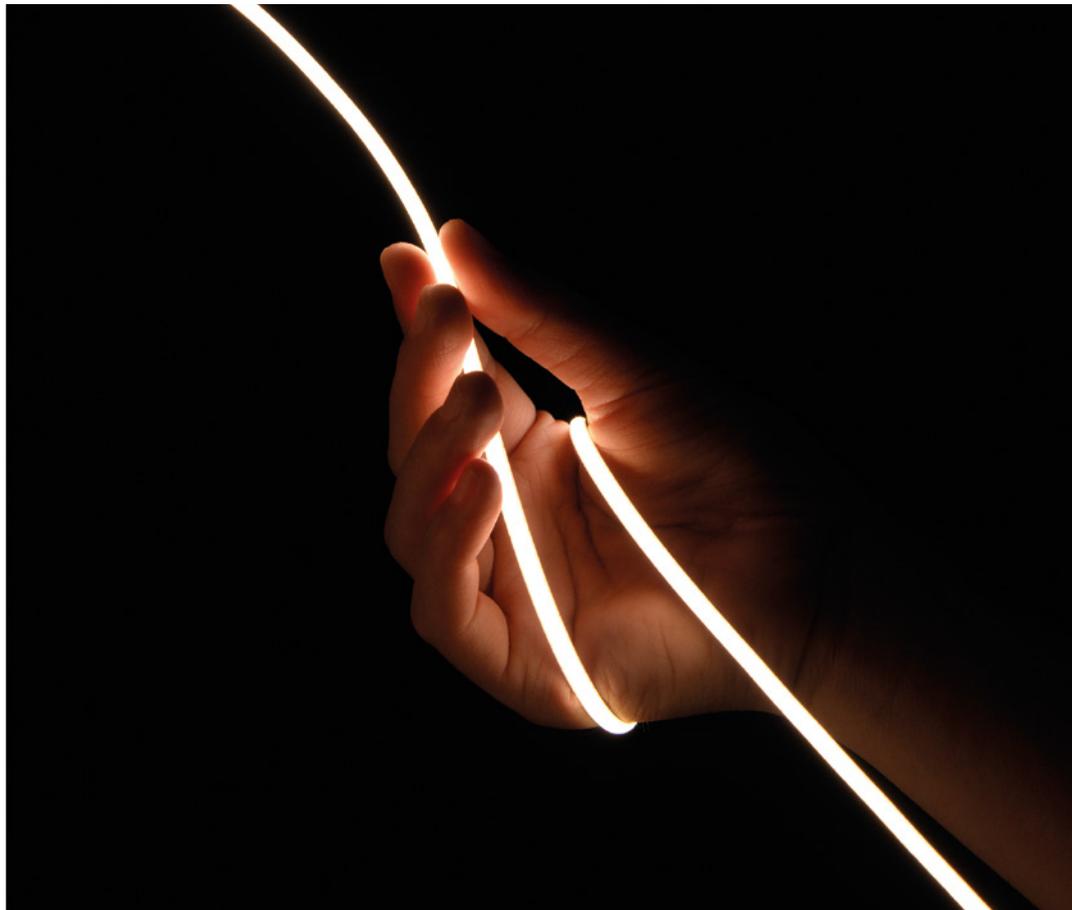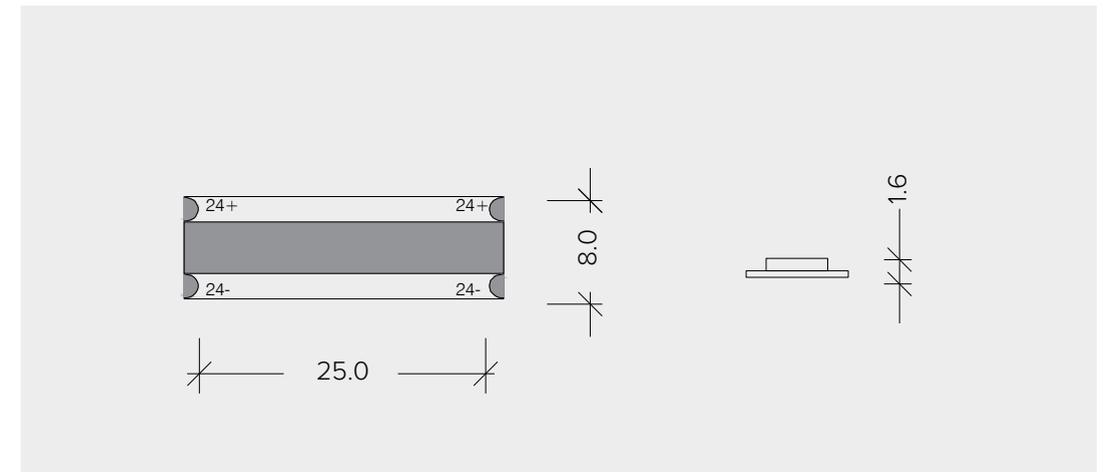

## LED Strip Options

COLOUR TEMP	LUMEN/M	EFFICACY	CODE
2700K	630 lm	79 lm/W	3030523
3000K	640 lm	80 lm/W	3034836
4000K	660 lm	83 lm/W	3035864

## Profile Kit Options

PROFILE	DIMENSIONS	MOUNTING	CODE
Surface	L2000 x W16 x H13mm	Surface	3032918
Corner	L2000 x W16 x H16mm	Surface	3032920

## LED Driver

WATTAGE	CONTROL	MAX.N° REELS	CODE
60W	Non-Dimmable	1	3037087
75W	Phase Dimmable	1	3037078
150W	Phase Dimmable	3	3037080
100W	0-10V Dimmable	2	3037083
250W	0-10V Dimmable	5	3037084
80W	DALI Dimmable	1	3037085
160W	DALI Dimmable	3	3037086

# High Output Series


This product has both high efficiency and bright LEDs, all the while maintaining a quality light with a CRI of 90. It's the ideal product for when the strip is the main source of light, or being used as an artistic feature.

**Application:** Highlighting ceilings, washing down walls, bathrooms, kitchens.

UKCA CE 5 YEARS IP20 CRI90 LDT

<b>Voltage</b>	24V
<b>Wattage</b>	14.4W/m
<b>CRI</b>	90
<b>LED/m</b>	160
<b>IP rating</b>	20
<b>Length</b>	5m
<b>Cutting length</b>	50mm
<b>Copper thickness</b>	3oz
<b>Warranty</b>	5 years
<b>Colour temp*</b>	2300K 2700K 3000K 4000K
<b>Driver type</b>	Constant voltage
<b>Driver included</b>	No

\*Other options available upon request

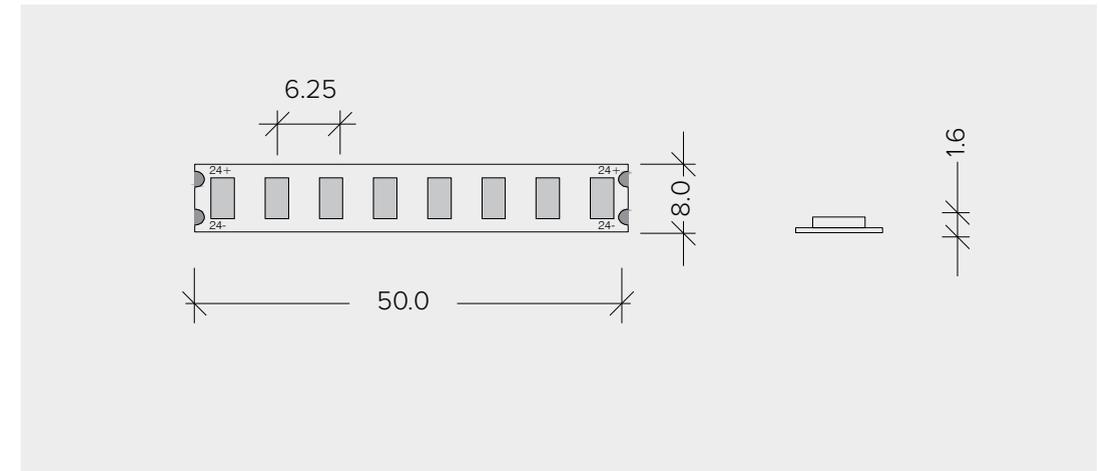

## LED Strip

COLOUR TEMP	R9	LUMEN/m	LUMEN/W	CODE
2300K	68	1390 lm	107 lm/W	3034838
2700K	69	1505 lm	116 lm/W	3030675
3000K	70	1585 lm	122 lm/W	3027599
4000K	79	1650 lm	127 lm/W	3034831

## Profile Kit

PROFILE	DIMENSIONS	MOUNTING	CODE
Surface	L2000 x W16 x H13mm	Surface	3032918
Corner	L2000 x W16 x H16mm	Surface	3032920

## LED Driver

WATTAGE	CONTROL	MAX.N° REELS	CODE
75W	Phase Dimmable	1	3037078
150W	Phase Dimmable	2	3037080
100W	0-10V Dimmable	1	3037083
250W	0-10V Dimmable	3	3037084
80W	DALI Dimmable	1	3037085
160W	DALI Dimmable	2	3037086

# Low Output Series


The diodes on this product are very efficient, using only 7.2W/m while providing an evenly distributed soft level of light. This strip is ideal for creating glow effects for furniture, and highlighting details in architecture.

**Application:** Highlighting ceilings, washing down walls, kitchens.

UKCA CE 5 YEARS IP20 LDT

<b>Voltage</b>	24V
<b>Wattage</b>	7.2W/m
<b>CRI</b>	80
<b>LED/m</b>	80
<b>IP rating</b>	20
<b>Length</b>	5m
<b>Cutting length</b>	100mm
<b>Copper thickness</b>	2oz
<b>Warranty</b>	5 years
<b>Colour temp*</b>	2300K 2700K 3000K 4000K
<b>Driver type</b>	Constant voltage
<b>Driver included</b>	No

\*Other options available upon request

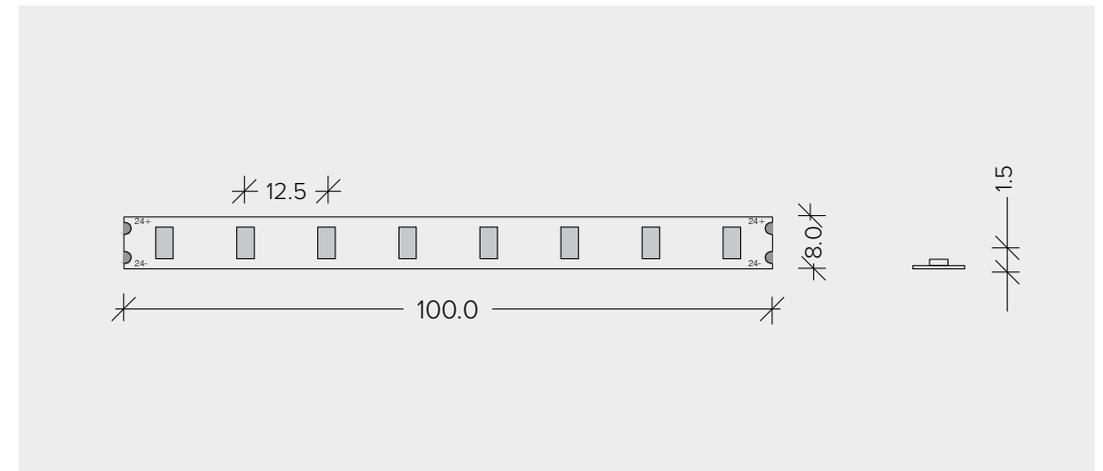

## LED Strip

COLOUR TEMP	LUMEN/m	LUMEN/W	CODE
2300K	890 lm	135 lm/W	3034839
2700K	960 lm	145 lm/W	3030253
3000K	1010 lm	153 lm/W	3027598
4000K	1050 lm	160 lm/W	3034832

## Profile Kit

PROFILE	DIMENSIONS	MOUNTING	CODE
Surface	L2000 x W16 x H13mm	Surface	3032918
Corner	L2000 x W16 x H16mm	Surface	3032920

## LED Driver

WATTAGE	CONTROL	MAX.N° REELS	CODE
60W	Non-Dimmable	1	3037087
75W	Phase Dimmable	2	3037078
150W	Phase Dimmable	3	3037080
100W	0-10V Dimmable	2	3037083
250W	0-10V Dimmable	6	3037084
80W	DALI Dimmable	2	3037085
160W	DALI Dimmable	4	3037086

# IP Rated Series Low Output


This LED Strip has all the benefits of our Low Output Series, plus an IP67 rating, making it suitable for all wet environments.

**Application:** Bathrooms, wetrooms, bar counters, hotels.

UKCA CE 5 YEARS IP67 LDT

<b>Voltage</b>	24V
<b>Wattage</b>	7.2W/m
<b>CRI</b>	80
<b>LED/m</b>	80
<b>IP rating</b>	67
<b>Length</b>	5m
<b>Cutting length</b>	100mm
<b>Copper thickness</b>	2oz
<b>Warranty</b>	5 years
<b>Colour temp*</b>	2700K 3000K 4000K
<b>Driver type</b>	Constant voltage
<b>Driver included</b>	No

\*Other options available upon request

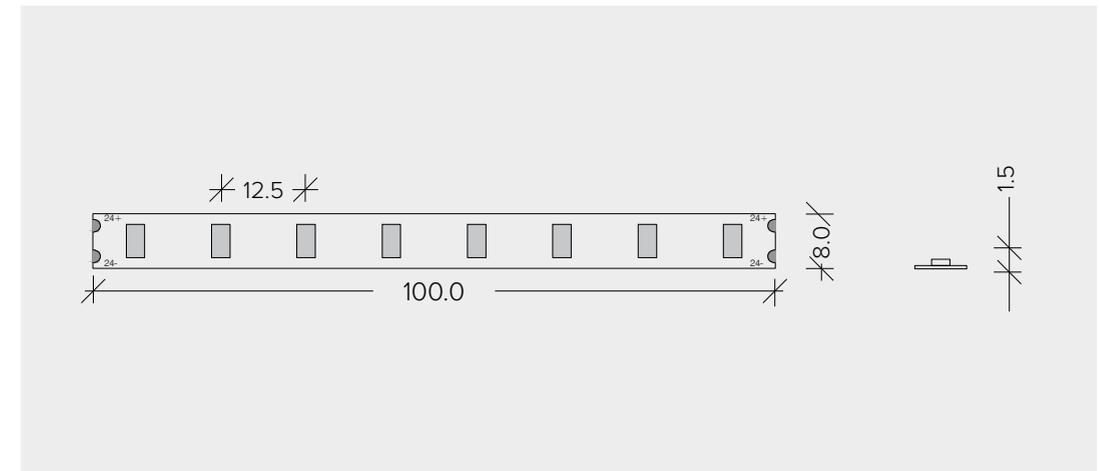

## LED Strip

COLOUR TEMP	LUMEN/m	LUMEN/W	CODE
2700K	862 lm	120 lm/W	3027600
3000K	889 lm	123 lm/W	3027172
4000K	924 lm	128 lm/W	3034835

## Profile Kit

PROFILE	DIMENSIONS	MOUNTING	CODE
Surface	L2000 x W16 x H13mm	Surface	3032918
Corner	L2000 x W16 x H16mm	Surface	3032920
Floor	L2000 x W21.4 x H27mm	Recessed	3032919

## LED Driver

WATTAGE	CONTROL	MAX.N° REELS	CODE
60W	Non-Dimmable	1	3037087
75W	Phase Dimmable	2	3037078
150W	Phase Dimmable	3	3037080
100W	0-10V Dimmable	2	3037083
250W	0-10V Dimmable	6	3037084
80W	DALI Dimmable	2	3037085
160W	DALI Dimmable	4	3037086

# IP Rated Series High Output


This LED Strip has all the benefits of our High Output Series, plus an IP67 rating, making it suitable for all wet environments.

**Application:** Bathrooms, wetrooms, bar counters, hotels.

UKCA CE 5 YEARS IP67 LDT

<b>Voltage</b>	24V
<b>Wattage</b>	14.4W/m
<b>CRI</b>	80
<b>LED/m</b>	160
<b>IP rating</b>	67
<b>Length</b>	5m
<b>Cutting length</b>	50mm
<b>Copper thickness</b>	3oz
<b>Warranty</b>	5 years
<b>Colour temp*</b>	3000K
<b>Driver type</b>	Constant voltage
<b>Driver included</b>	No

\*Other options available upon request

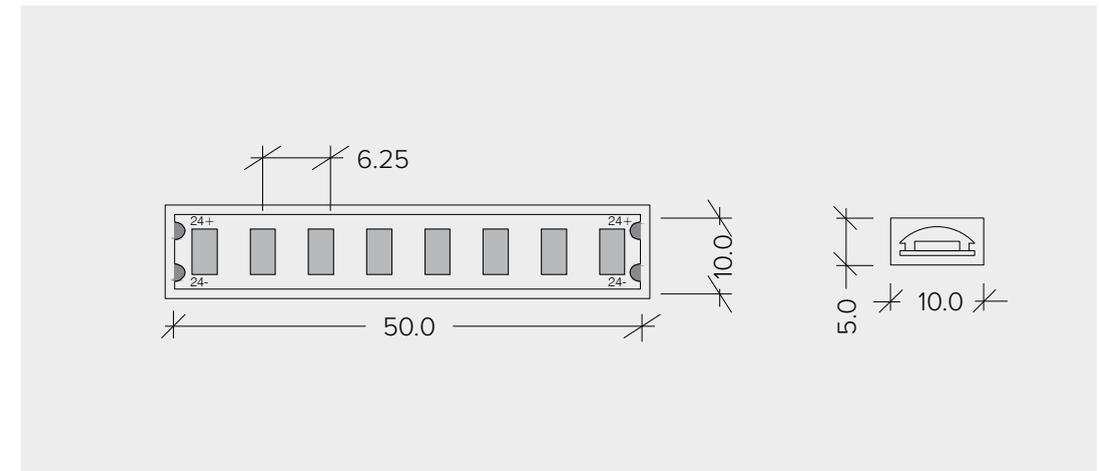

## Led Strip

COLOUR TEMP	LUMEN/m	LUMEN/W	CODE
3000K	1644 lm	144 lm/W	3027175

## Profile Kit

PROFILE	DIMENSIONS	MOUNTING	CODE
Surface	L2000 x W16 x H13mm	Surface	3032918
Corner	L2000 x W16 x H16mm	Surface	3032920
Floor	L2000 x W21.4 x H27mm	Recessed	3032919

## LED Driver

WATTAGE	CONTROL	MAX.N° REELS	CODE
75W	Phase Dimmable	1	3037078
150W	Phase Dimmable	2	3037080
100W	0-10V Dimmabl	1	3037083
250W	0-10V Dimmable	3	3037084
80W	DALI Dimmable	1	3037085
160W	DALI Dimmable	2	3037086



# Dim to Warm Series

The built in dim-to-warm technology means that this product emits a warmer light the lower it dims. It transforms spaces from productive, task-oriented, cooler lighting temperatures to warmer, more relaxing tones, allowing for flexibility and full control.

**Application:** Hotels, bedrooms, living rooms, kitchens.

<b>Voltage</b>	24V
<b>Wattage</b>	14.4W/m
<b>CRI</b>	93
<b>Lm/m</b>	1150
<b>Lm/W</b>	80
<b>IP Rating</b>	IP20
<b>Length</b>	5m
<b>Cutting length</b>	83.3mm
<b>Copper thickness</b>	2oz
<b>Warranty</b>	5 years
<b>Colour temp</b>	1900-3000K
<b>Driver type</b>	Constant voltage
<b>Driver included</b>	No

UKCA CE 5 YEARS IP20 CRI93 LDT

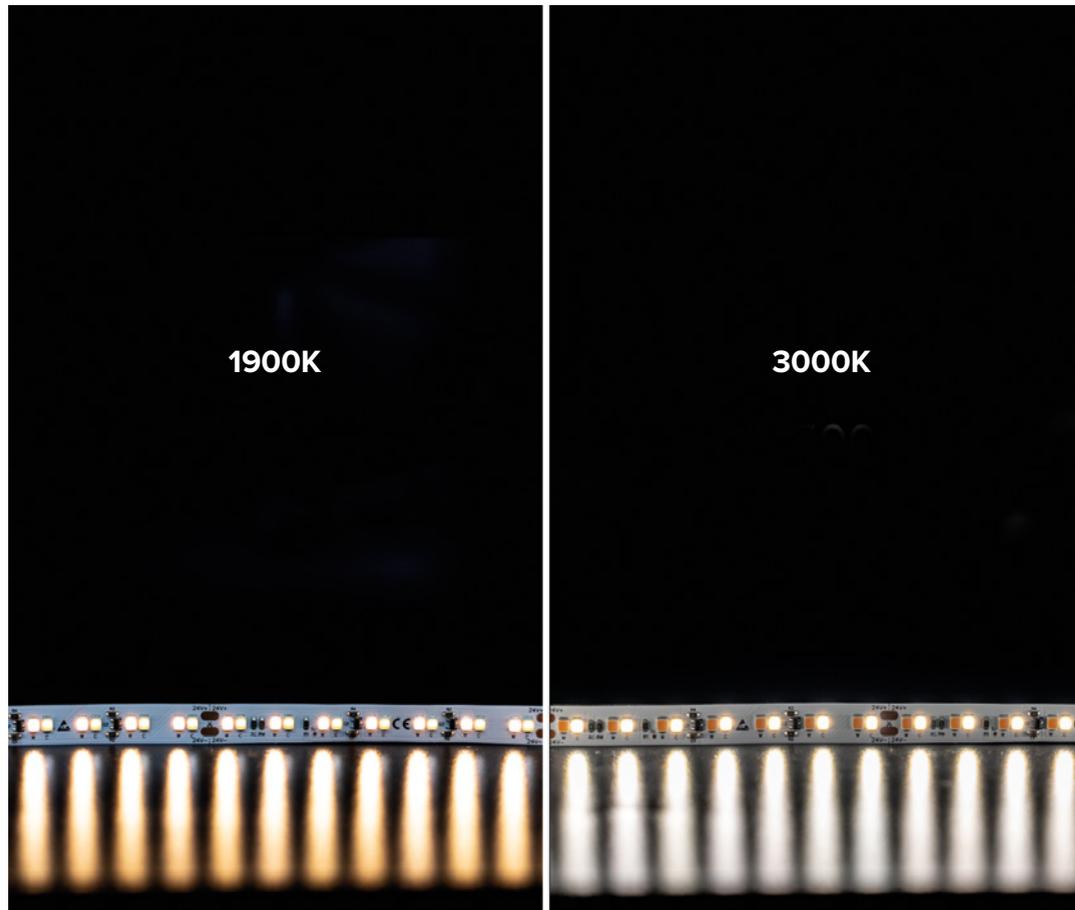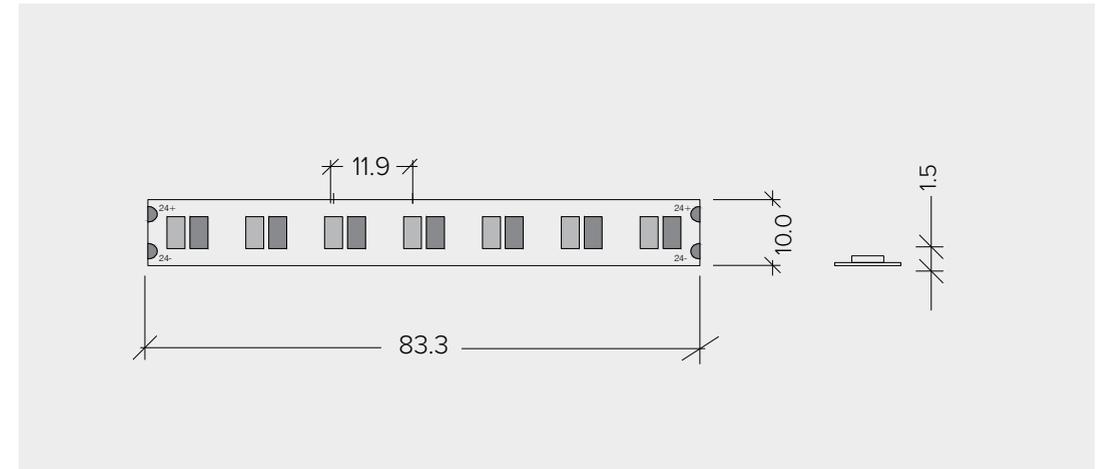

## Led Strip

COLOUR TEMP	WATTAGE	LUMEN OUTPUT	CODE
1900K-3000K	14.4 W/m	1150 lm	3027453

## Profile Kit

PROFILE	DIMENSIONS	MOUNTING	CODE
Surface	L2000 x W16 x H13mm	Surface	3032918
Corner	L2000 x W16 x H16mm	Surface	3032920

## LED Driver

WATTAGE	CONTROL	MAX.N° REELS	CODE
75W	Phase Dimmable	1	3037078
150W	Phase Dimmable	2	3037080
100W	0-10V Dimmable	1	3037083
250W	0-10V Dimmable	3	3037084
80W	DALI Dimmable	1	3037085
160W	DALI Dimmable	2	3037086

# Narrow Series



With a slim width of only 4mm, this high efficiency LED strip is a great solution when a small form factor and minimal look is required.

**Application:** Furniture detail, coffers, shelving.

UKCA CE 5 YEARS IP20 CRI90 LDT

<b>Voltage</b>	24V
<b>Wattage</b>	7.2W/m
<b>CRI</b>	90
<b>Led/m</b>	140
<b>IP rating</b>	20
<b>Length</b>	5m
<b>Cutting length</b>	50mm
<b>Warranty</b>	5 years
<b>Copper thickness</b>	2oz
<b>Colour temp*</b>	2700K 3000K 4000K
<b>Driver type</b>	Constant voltage
<b>Driver included</b>	No

\*Other options available upon request

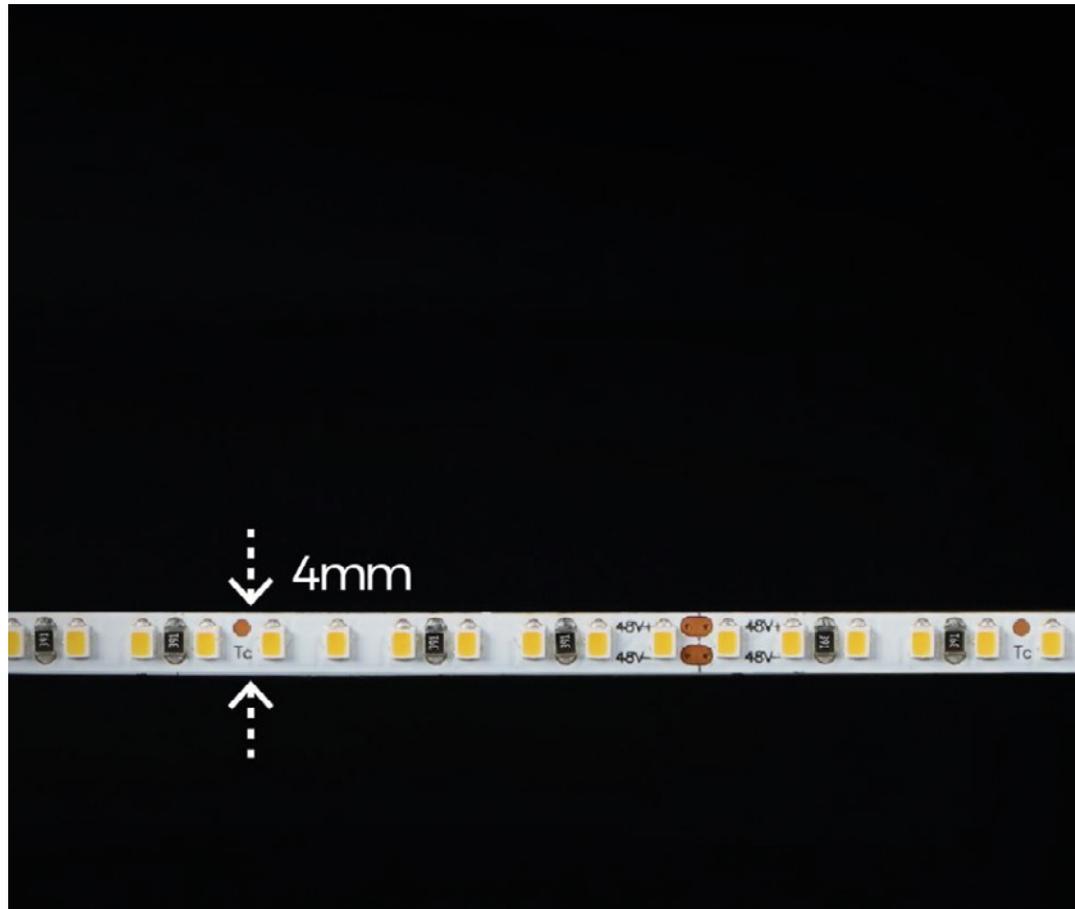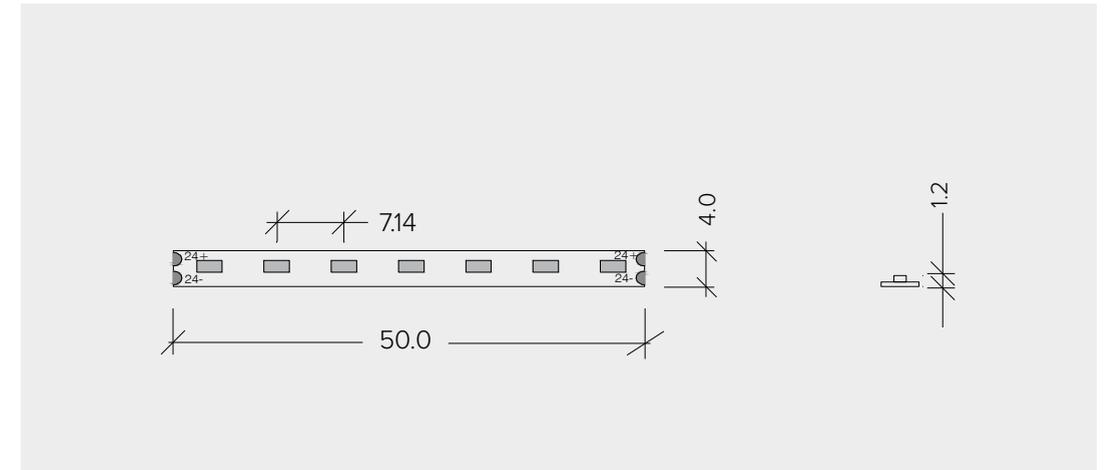

## Led Strip

COLOUR TEMP	LUMEN/M	LUMEN/W	CODE
2700K	660 lm	92 lm/W	3032922
3000K	685 lm	95 lm/W	3032923
4000K	710 lm	108 lm/W	3034834

## Profile Kit

PROFILE	DIMENSIONS	MOUNTING	CODE
Furniture	L2000 x 124 x H9mm	Recessed	3032921

## LED Driver

WATTAGE	CONTROL	MAX.N° REELS	CODE
60W	Non-Dimmable	1	3037087
75W	Phase Dimmable	2	3037078
150W	Phase Dimmable	3	3037080
100W	0-10V Dimmable	2	3037083
250W	0-10V Dimmable	6	3037084
80W	DALI Dimmable	2	3037085
160W	DALI Dimmable	4	3037086

# Neon Series



Neon side bending tape is a perfect solution for when curved lines of light are required. With an IP67 rating and resistance to saline solutions, acid & alkali, corrosive gases, fire and UV it can be widely used in indoor & outdoor environments, for building outlining and night scene lighting.

**Application:** Building facades, wet rooms, bathrooms, spas, pool areas, atriums, marine applications.

<b>Voltage</b>	24V
<b>CRI</b>	90
<b>Led/m</b>	140
<b>IP rating</b>	IP67
<b>Length</b>	5m
<b>Cutting length</b>	50mm
<b>Warranty</b>	5 years
<b>Colour temp.</b>	2700K 3000K 4000K RGBW 3000K
<b>Driver type</b>	Constant voltage
<b>Driver included</b>	No

\* Other options available upon request

UKCA CE 5 YEARS IP67 24V

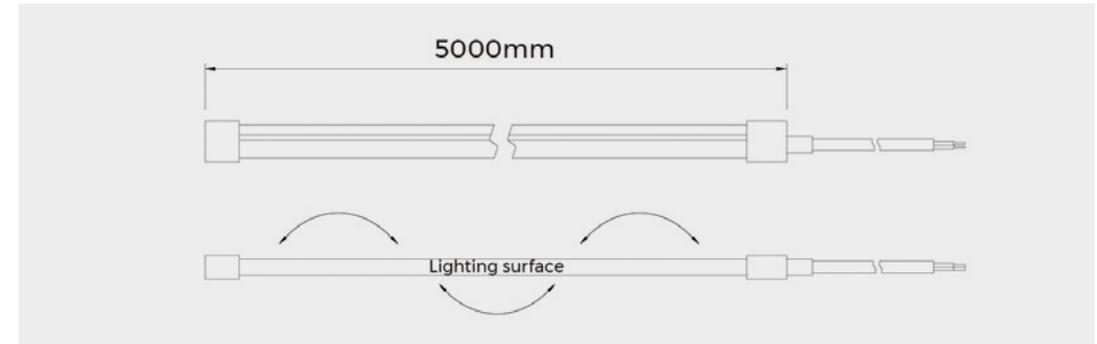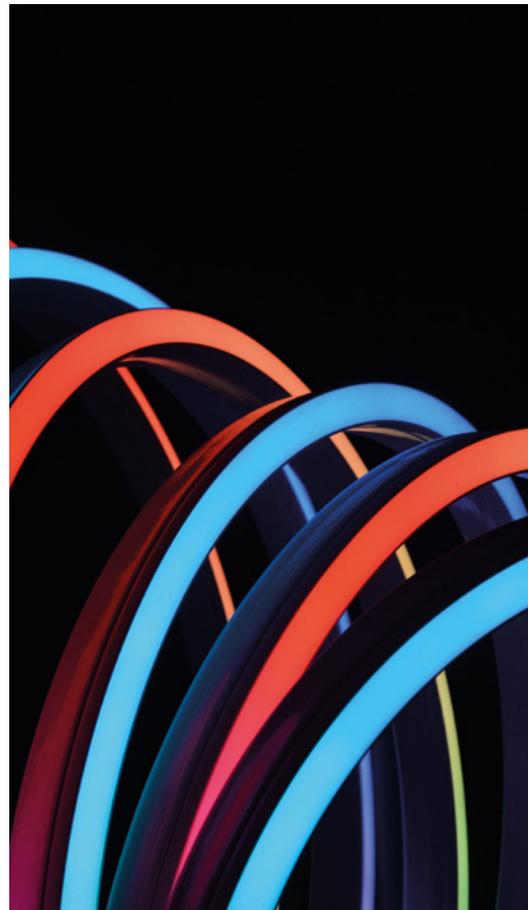

## Led Strip

COLOUR TEMP	LUMEN/M	LUMEN/W	POWER	CODE
2400K	400 lm	41 lm/W	9.6 W/m	3035020
2700K	410 lm	43 lm/W	9.6 W/m	3035021
3000K	450 lm	46.9 lm/W	9.6 W/m	3035022
RGBW 3000K	140 lm	10 lm/W	14.4 W/m	3035023

## Accessories

DESCRIPTION	CODE
Solderless powerfeed, bottom connection, suitable for single colour strip only	3025076
Solderless powerfeed, left connection, suitable for single colour strip only	3035024
Solderless joiner, end to end, suitable for single colour strip only	3021976
Silicone end cap kit	3020289

## Profile Kit Options


Suitable for surface or recessed mounting

PROFILE KIT	NOTE	DIMENSIONS (MM)	CODE
1m Profile	For straight runs	L1000 x W15 x H19	3029645
25mm Clip	For controlling curves. 30cm spacing	L25 x W15 x H19	3021977

## LED Driver

WATTAGE	CONTROL	MAX.N° REELS	CODE
60W	Non-Dimmable	1	3037087
75W	Phase Dimmable	1	3037078
150W	Phase Dimmable	3	3037080
100W	0-10V Dimmable	2	3037083
250W	0-10V Dimmable	5	3037084
80W	DALI Dimmable	1	3037085
160W	DALI Dimmable	3	3037086

# Profiles

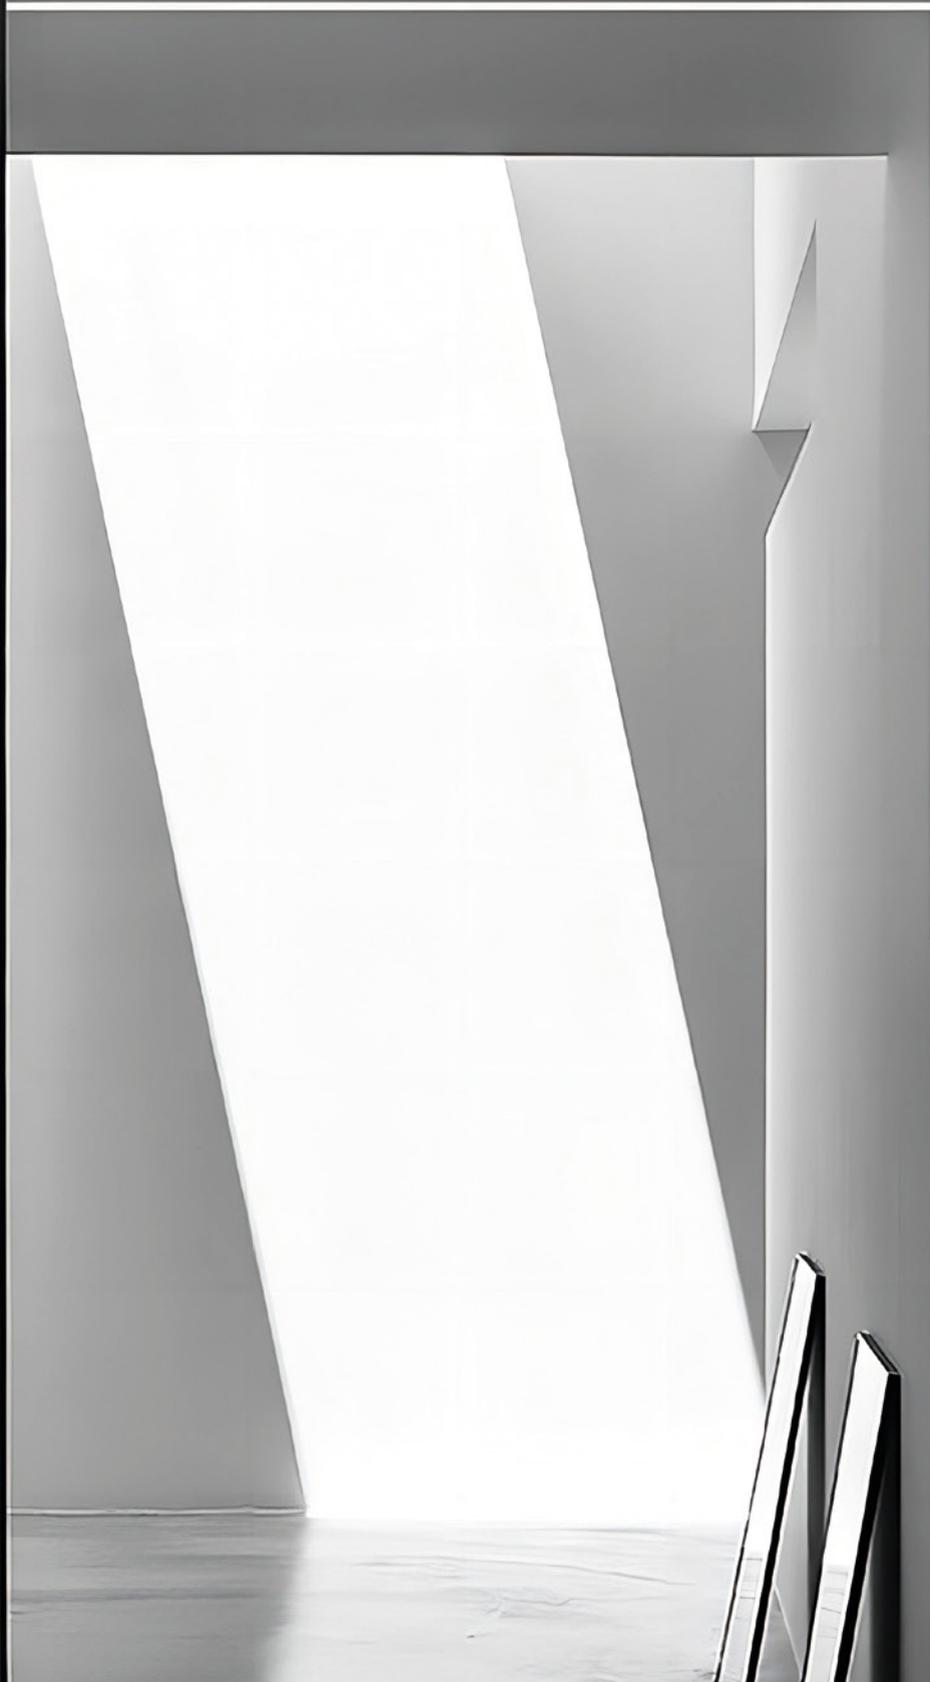

# Lari

This plastered-in profile emits seamless lines of light. It's ideal for projects where the light is the feature, and can be used creatively in countless configurations.


LED strip and driver sold separately.

**Application:** Lobbies, feature walls, cafés, hotels.

UKCA CE 3 YEARS IP20




## Profile 1.5 m

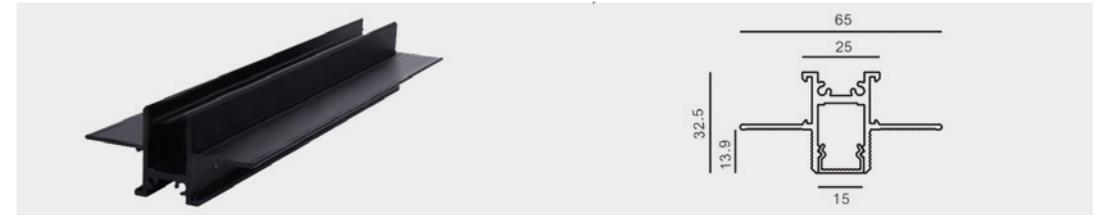


CODE 3019943

## Diffuser 1.5m

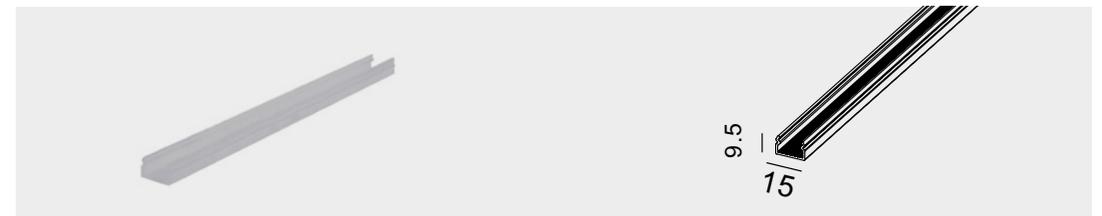


CODE 3023089

## Corner

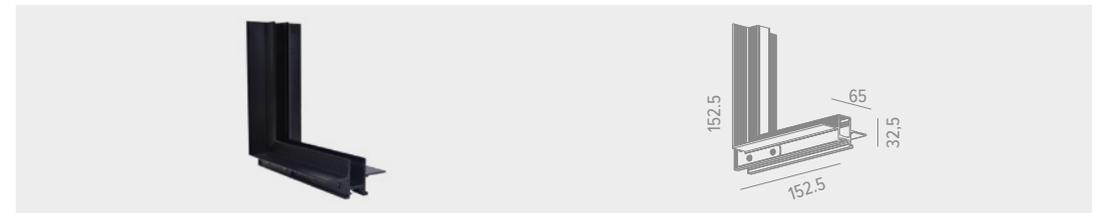


CODE 3019500

## Joint

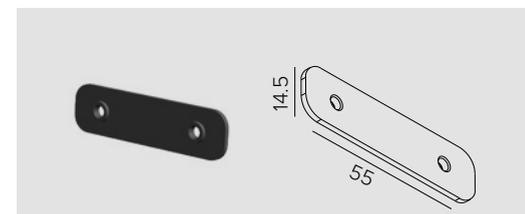

CODE 3019507

## Side

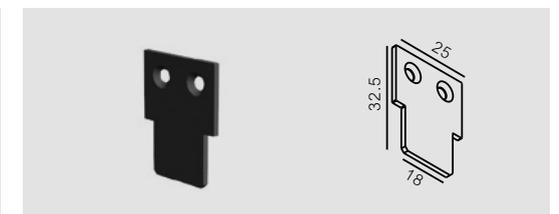

CODE 3015011


# Wall Washer Profile

This profile kit adds depth and texture to a space by washing down walls. With a seamless, plastered-in finish, it is great for projects where architectural detail needs highlighting.

LED strip and driver sold separately.

**Application:** Residential, hospitality, kitchens.

CE UKCA IP20 3 YEARS

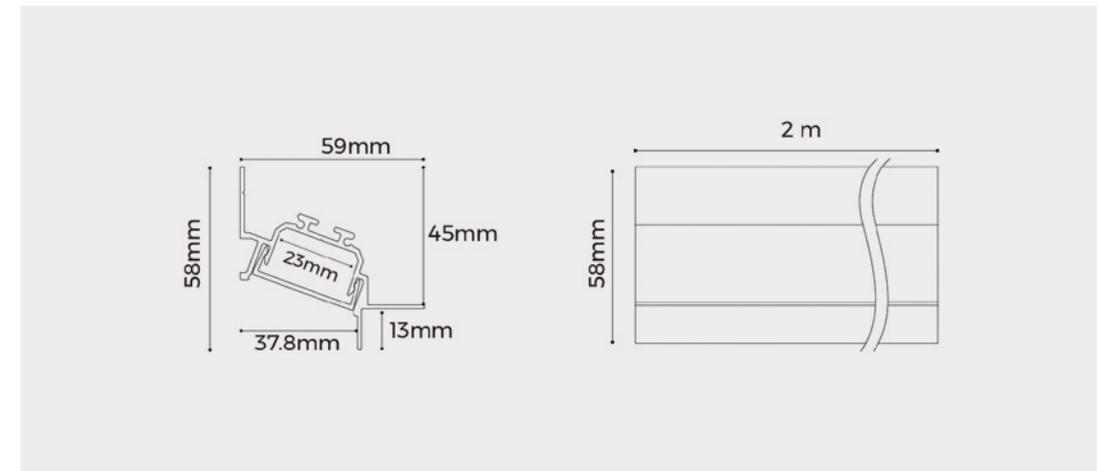

**WALL WASHER PROFILE**

**CODE**

Kit (incl. profile, diffuser, end caps & plaster-in kit)

3035028



# Profile Kits

These 2 metre long kits come with everything needed to house LED Strip, and can be cut to any size. The anodised aluminium profile provides heat dissipation, the PC diffuser helps emit uniform and soft lighting, and they can be used in a variety of applications.

**Application:** Residential, hospitality.

## Surface Mounted


CE UKCA IP20

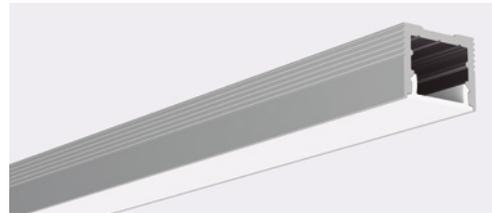

CODE 3032918

## Corner Mounted


CE UKCA IP20



CODE 3032920

## Floor Mounted


CE UKCA IK10 IP65



CODE 3032919

## Furniture Recessed

CE UKCA IP20



CODE 3032921

# Track Systems



# Luna Magnetic Track


This slimline magnetic track is available in a surface mounted version or recessed and plastered in. Both versions share the same light fittings. The lights are magnetically connected, meaning that once the track is installed they can be added and adjusted by hand without the need for an electrician or tools. Ideal for spaces that require flexibility and customers that appreciate innovative technology.

**Application:** Restaurants, dressing rooms, kitchens, spot lighting, general lighting.

UKCA CE 2 YEARS IP20 48V



## Track Made Simple

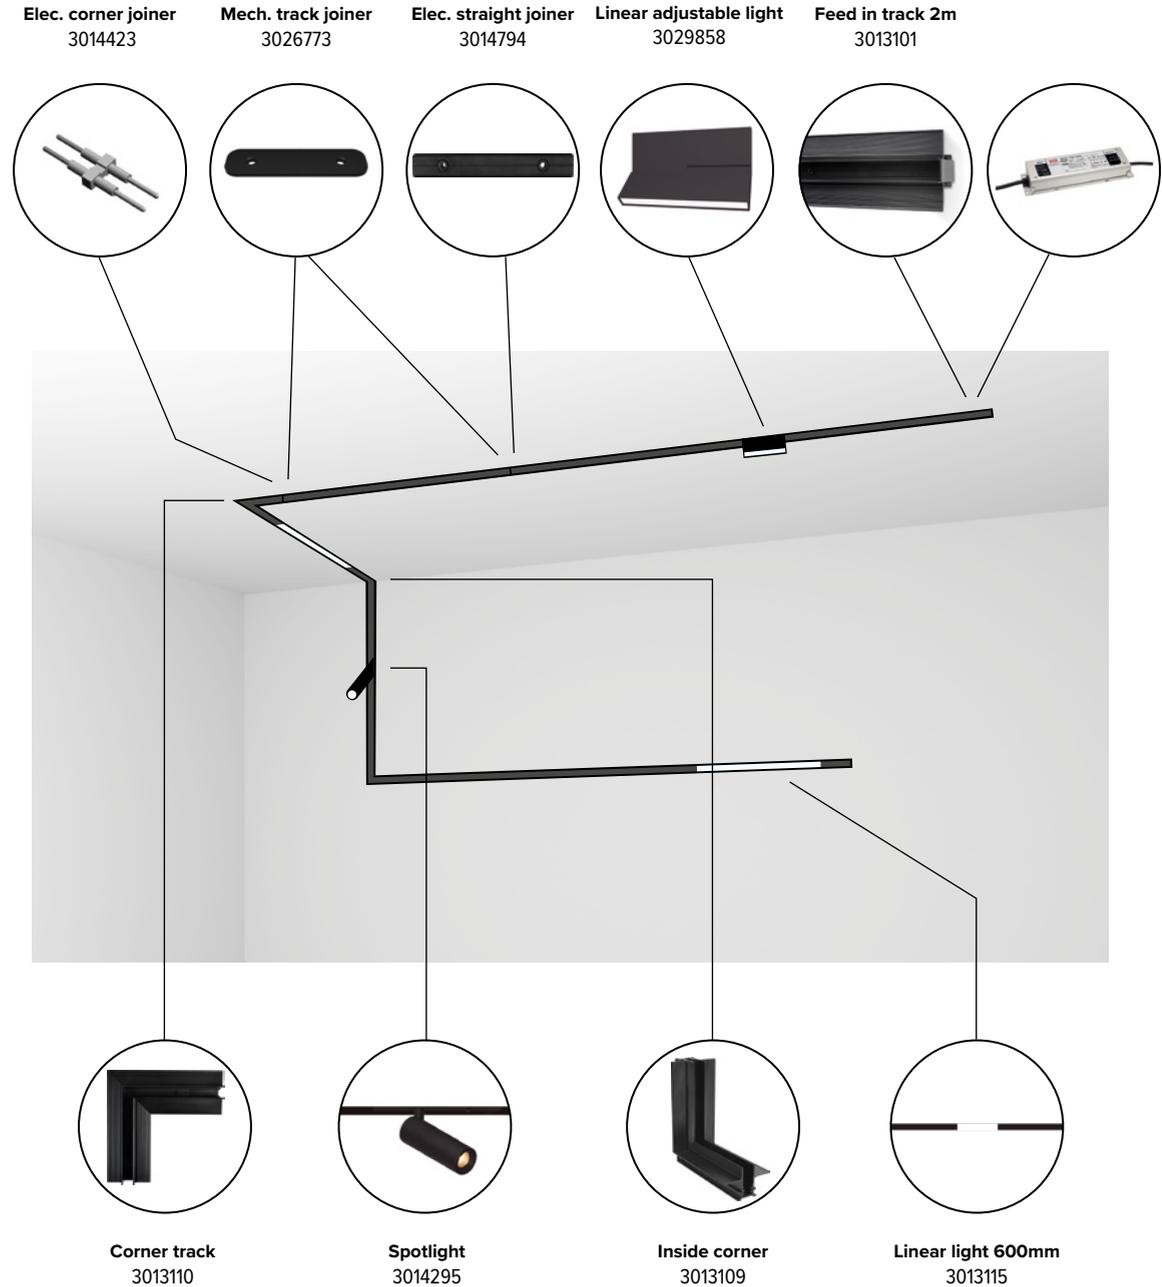


# Luna Recessed Magnetic Track Parts

All the parts needed to build this unique, magnetic track system. When connecting track pieces you need to choose a mechanical joiner and the correct electrical joiner.

Track cannot be cut.

## Feed track


Length 2000mm

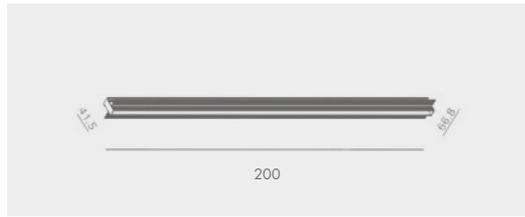

CODE 3013101

## Intermediate track


Length 1000mm

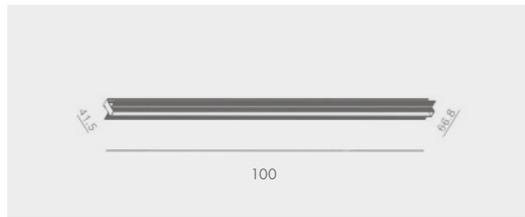

CODE 3013104

## Mechanical track joiner


For mechanically connecting any 2 pieces of track

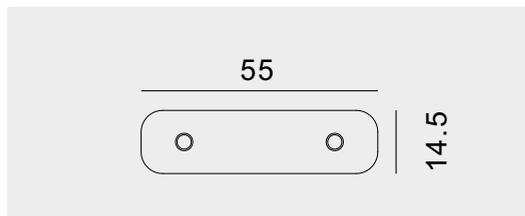

CODE 3026773

## Electrical track joiner, straight



For electrically connecting 2 straight lengths of track

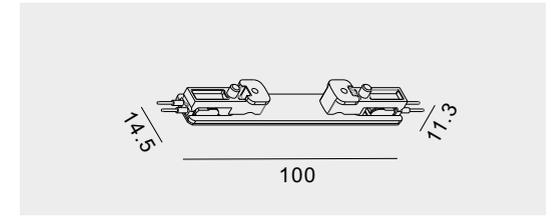

CODE 3014794

## Electrical track joiner, corner


For electrically connecting a straight piece of track to a corner piece

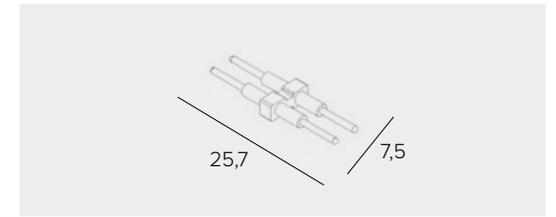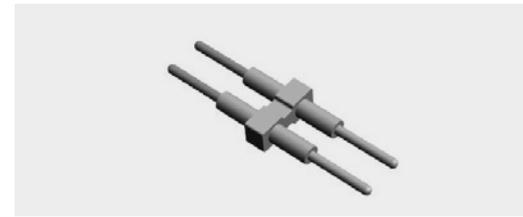

CODE 3014423

## Internal Corner track


For internal corners, such as wall to roof, or 2 walls

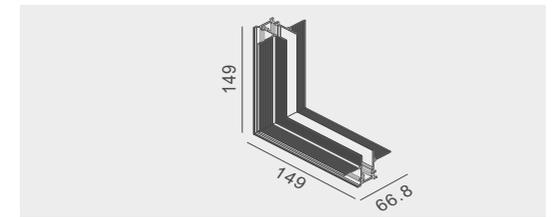

CODE 3013109

## Corner track

For turning a corner, sideways, on the same surface

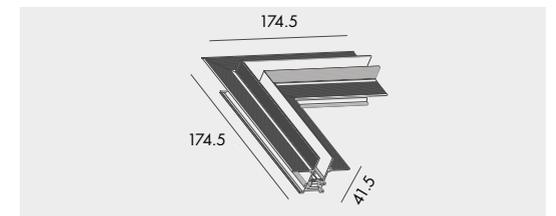

CODE 3013110


# Luna Surface Magnetic Track Parts

Surface Luna is available in straight runs only. Connecting track sections only requires an electrical joiner. Use the surface mounting clips for easy installation.

Track cannot be cut.

## Power Feed Track 1m


Length 1000mm

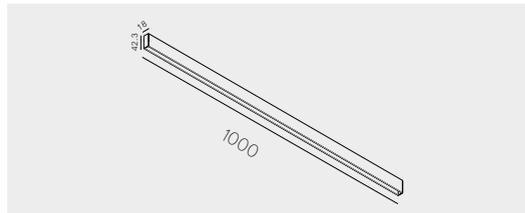

CODE 3013120

## Intermediate Track 1.5m


Length 1500mm

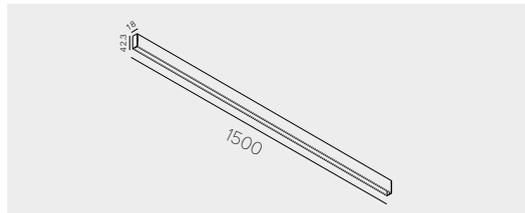

CODE 3013124

## Intermediate Track 1m



Length 1000mm

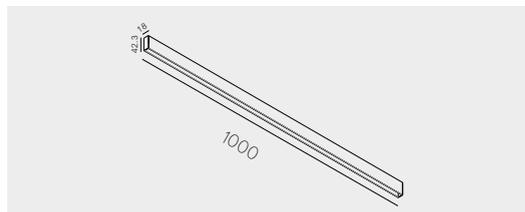

CODE 3013125

## Surface Mounting Clips


We recommend using 2 clips per metre

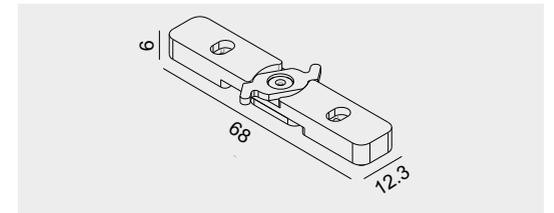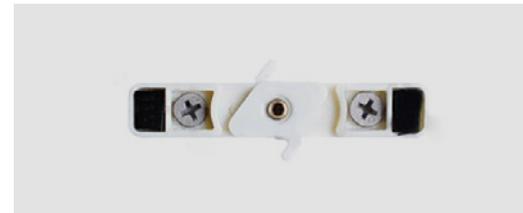

CODE 3013130

## Electrical Track Joiner

Required when joining any 2 pieces of track

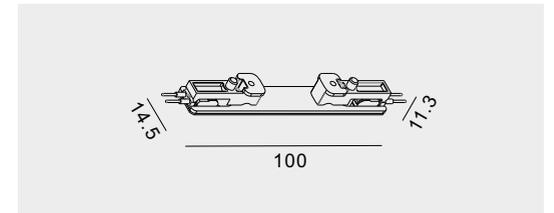

CODE 3014794

# Luna Magnetic Track Lights


Quality, well-designed light sources suitable for the 48V magnetic track. These can be moved and re-organised along the track at any time after installation.

<b>Material</b>	Aluminium
<b>IP rating</b>	IP20
<b>Warranty</b>	2 years
<b>Colour temp*</b>	3000K
<b>Light source</b>	Integrated LED
<b>Driver included</b>	No

\*Other Options available upon Request

## Linear Light 300mm



<b>Wattage</b>	11.3W
<b>Lumen output</b>	456lm
<b>Dimming</b>	No
<b>CRI</b>	80

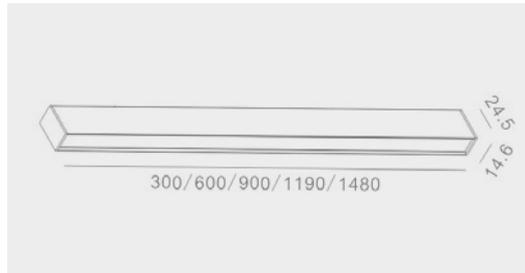

CODE 3013114

## Linear Light 600mm

<b>Wattage</b>	20W
<b>Lumen output</b>	912lm
<b>Dimming</b>	No
<b>CRI</b>	80

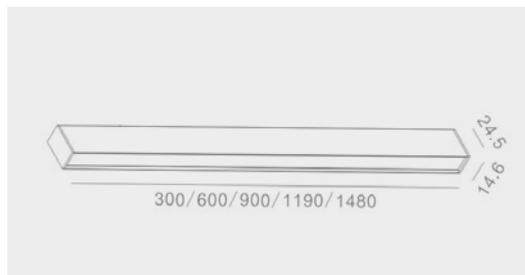
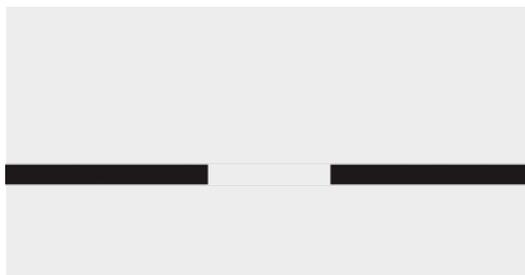


CODE 3013115

## Spotlight

(with on-board dimming)


<b>Wattage</b>	11.6W
<b>Lumen output</b>	683lm
<b>Beam angle*</b>	26°
<b>Dimming</b>	On-Board Only
<b>CRI</b>	90

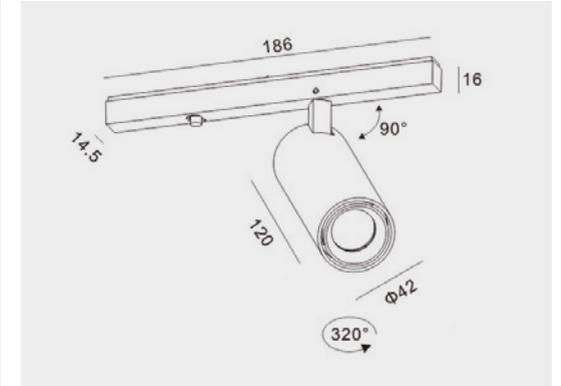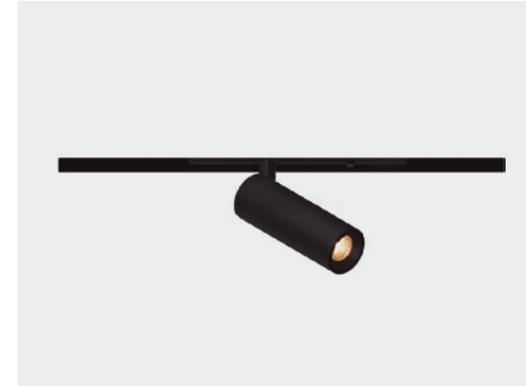

CODE 3014295

## Linear Adjustable Light

<b>Wattage</b>	5.2W
<b>Lumen output</b>	206lm
<b>Dimming</b>	No
<b>CRI</b>	80

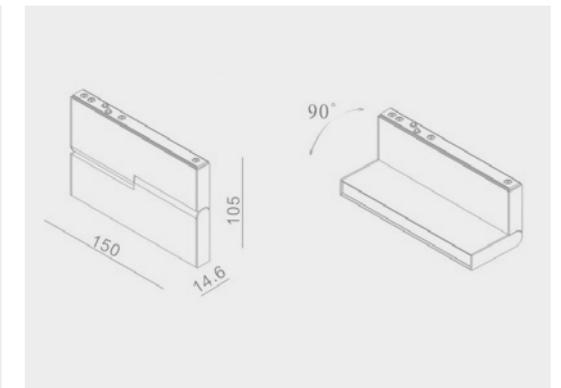

CODE 3029858

## Constant Voltage Driver

VOLTAGE	WATTAGE	CURRENT	DIMMING	IP RATING	DIMENSIONS (MM)	CODE
48V	100W	4.2A	Non-Dim	IP67	190l x 52w x 37h	3015923
48V	150W	6.25A	Non-Dim	IP67	256l x 78w x 47h	3024822

## Standard Track - Three Circuit

Our standard 3-circuit track is tried and tested, the quality choice of both professionals and lighting manufacturers. Its diverse options are quick and easy to install, resulting in overall cost and time savings.


**Application:** Commercial, residential, kitchens, corridors, museums, hospitality.

UKCA CE 1 YEAR IP20 240V




# Standard Track - Three Circuit

## 3 Circuit Track 1m Surface Mounted

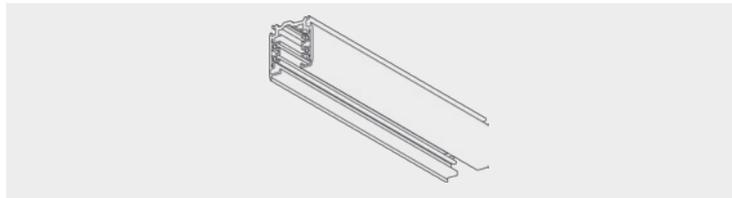


Black	3009908
White	3022021

## 3 Circuit Track 2m Surface Mounted

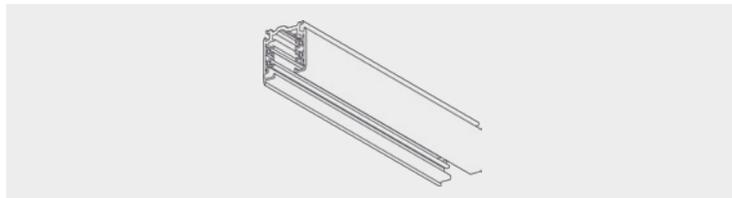


Black	3009907
White	3022020

## Power Feed In

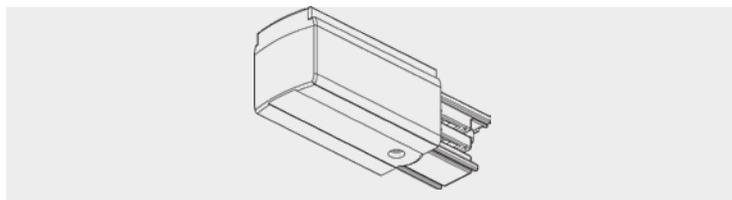


Black	3009912
White	3015330

## Electrical Track Joiner

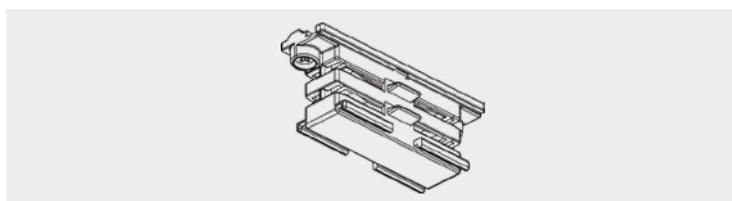


Black	3009914
White	3012860

## Ceiling Mounting Bracket (2 minimum required per section)

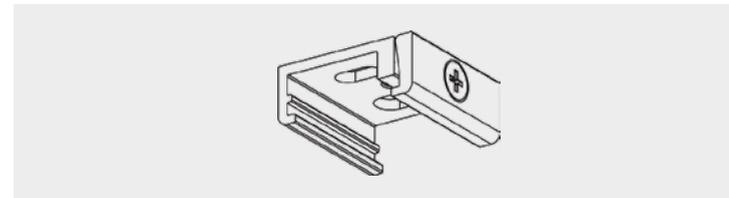


Black	3009922
White	3009976

## Adjustable Corner Joint

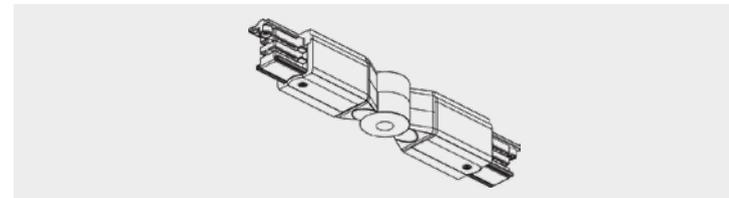

Black	3032327
White	3034830

## End cap

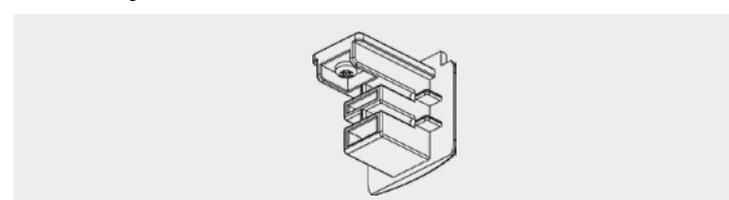

Black	3009913
White	3012862

## Suspension Kit 3m



Black	3015204
White	3021702

# Top Track Spot


With its low glare optics, minimalist design and easily replaceable GU10 lamps this spotlight is perfect for smaller scale projects. Compatible with our 3-circuit track.

**Application:** Coffee shops, shops, and small residential.

UKCA CE 5 YEARS IP20

<b>Material</b>	Aluminium
<b>Diameter</b>	54mm
<b>Height</b>	110mm
<b>IP rating</b>	IP20
<b>Input voltage</b>	100-240VAC
<b>Warranty</b>	5 years
<b>Dimmable*</b>	Yes
<b>Light source</b>	GU10
<b>Driver included</b>	No

\* With our recommended lamp

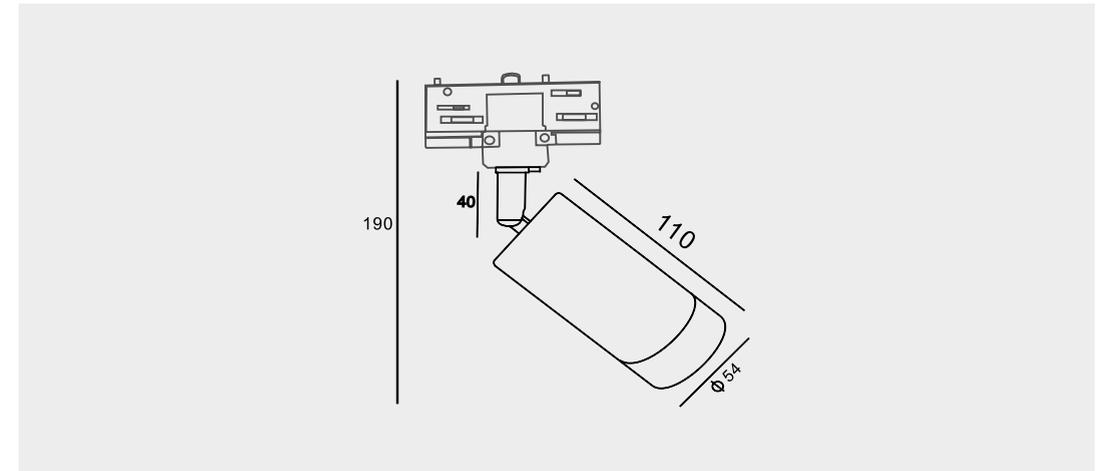

## Recommended Lamps

see page 126

COLOUR TEMP	BEAM ANGLE	LUMEN	CODE
2700K	60°	550 lm	3034895
3000K	60°	550 lm	3034896

## Top Track Spot

COLOUR	CODE
White Outer/Black Inner	3035018
Black Outer/Black Inner	3035019

# Orian Track Spot


This professional quality spotlight features clean looking lines, mains-dimming, and a high-CRI and low glare light output. Compatible with our 3-circuit track.

**Application:** Coffee shops, shops, and small residential.



<b>System power</b>	13W
<b>Flux</b>	1000lm
<b>Beam angle</b>	25°
<b>Material</b>	Aluminum
<b>IP rating</b>	IP20
<b>Input voltage</b>	100-240VAC
<b>Warranty</b>	5 Years
<b>CRI</b>	90
<b>Dimming range</b>	30-100%
<b>Colour temp*</b>	3000K
<b>Light source</b>	Integrated LED
<b>Driver included</b>	Integrated

\*Other options available upon request

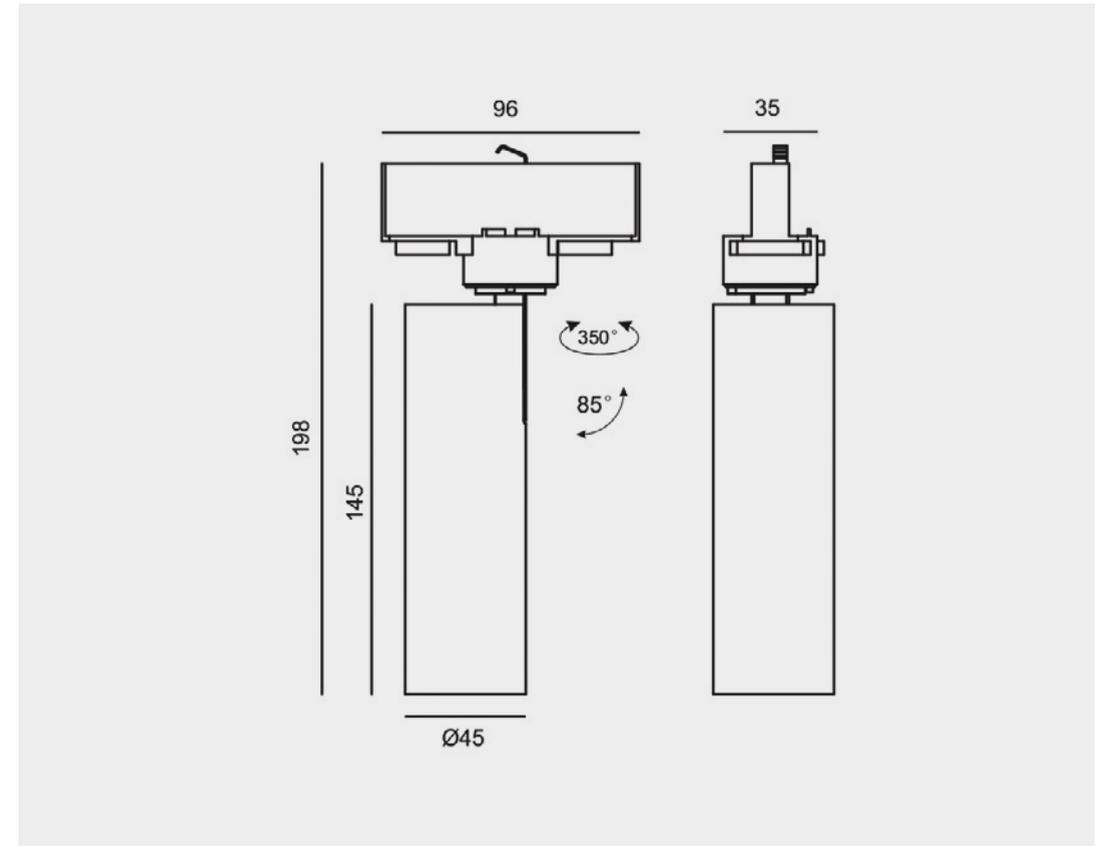

## Orian Track Spot

COLOUR	CODE
Black	3028467
White	3030679

# Wall Lights




# Set

This slim wall lamp with a domed lens adds interest to blank walls. Projecting light up and down, it creates a warm, symmetrical glow.

**Application:** Restaurants, bars, lobbies, stairwells, corridors.

- UKCA
- CE
- 3 YEARS
- IP20
- LDT

<b>Wattage</b>	7.8W
<b>Lumen output</b>	654lm
<b>Size</b>	100*70*40mm
<b>IP rating</b>	IP20
<b>Voltage</b>	230-240V
<b>Warranty</b>	3 years
<b>Colour temp</b>	3000K
<b>Light source</b>	Integrated LED
<b>Driver included</b>	Integrated
<b>Dimmable</b>	Yes

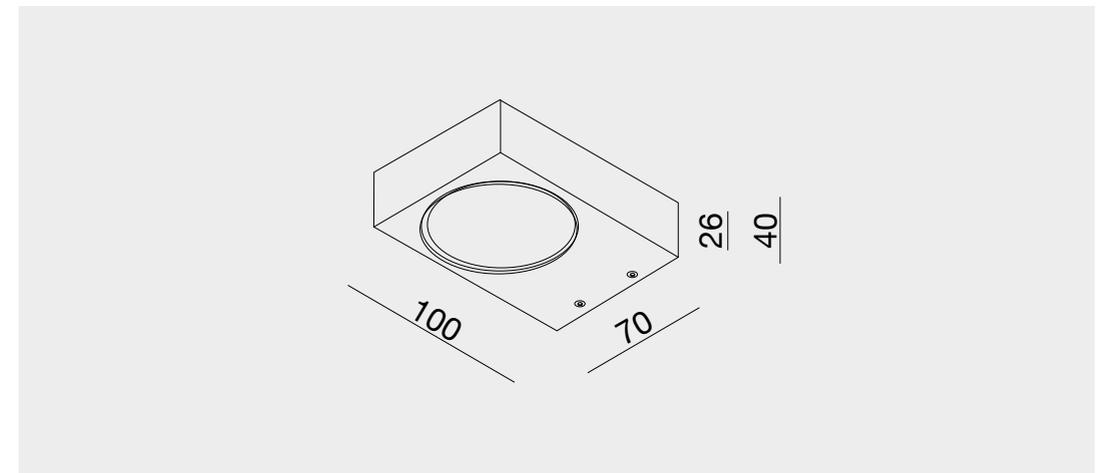

**Set**

COLOUR	CODE
White	3016794
Black	3019325


# Adray

From a narrow slit of light for a dramatic effect, to a wide beam of light for illuminating a corridor - the Adray has versatility built in. The shutters on the top and the bottom are adjustable, enabling the angle and direction of light to be controlled. It is also possible to switch the light between up, down and up/down modes.

**Application:** Corridors, lobbies, staircases.

<b>Wattage</b>	7.7W
<b>Lumen output</b>	379lm
<b>Size</b>	90*90*90mm
<b>IP rating</b>	IP20
<b>Voltage</b>	230-240V
<b>Warranty</b>	5 years
<b>Colour temp</b>	3000K
<b>Light source</b>	Integrated LED
<b>Driver included</b>	Integrated
<b>Dimmable</b>	Yes

UKCA CE 5 YEARS IP20

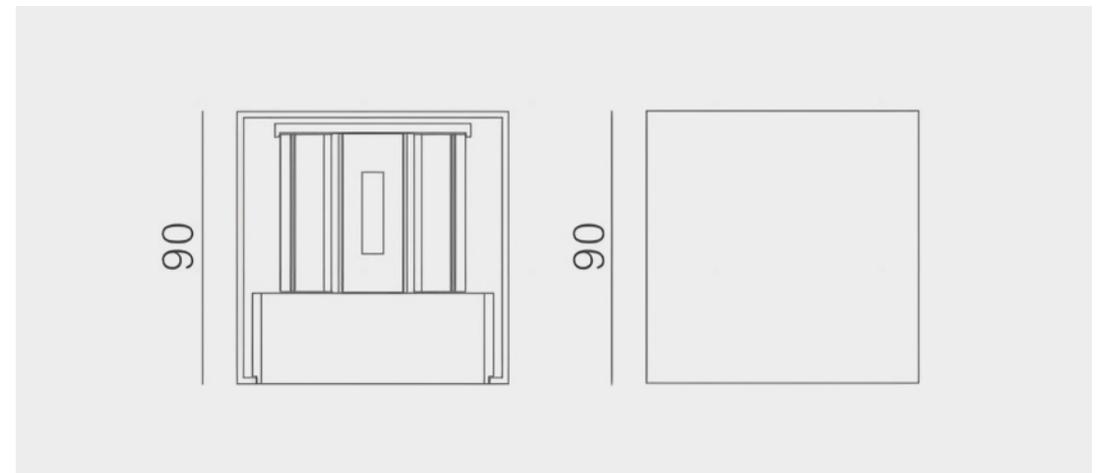

**Adray**

COLOUR	CODE
White	3034879
Black	3030479


# Bel

With its soft, directional light, and 350° rotation this wall light is surprisingly versatile. An ideal bedside companion, but its size and style also mean it is suitable for illuminating pictures, artwork, or creating an ambiance in a corridor.

**Application:** Bedside, corridor, picture lights.

UKCA CE 3 YEARS IP20

<b>Wattage</b>	5W
<b>Lumen output</b>	138lm
<b>IP rating</b>	IP20
<b>Voltage</b>	230-240V
<b>Warranty</b>	3 years
<b>Colour temp</b>	3000K
<b>Light source</b>	Integrated LED
<b>Driver included</b>	Integrated
<b>Dimmable</b>	Yes

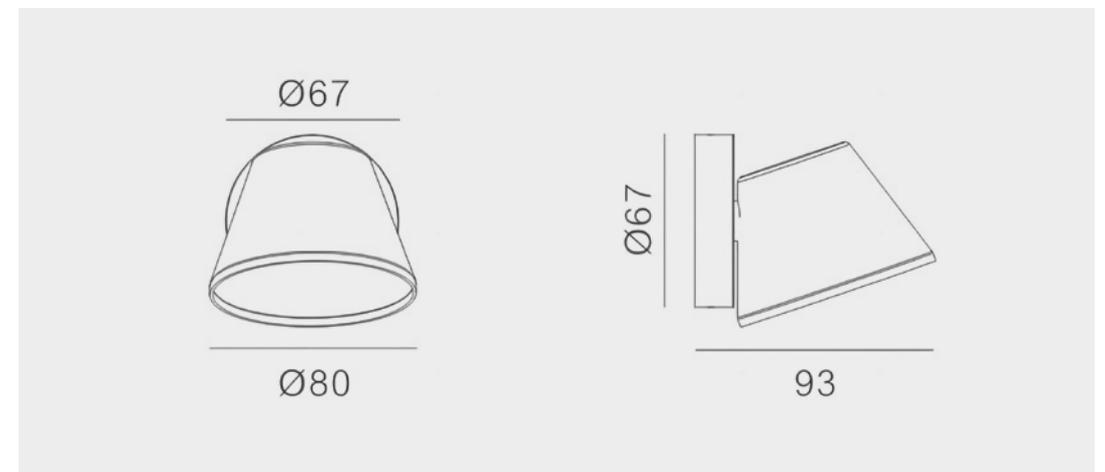

## Bel

COLOUR	CODE
White	3034883
Black	3025055


# Tatou

This clean and slender switched reading light can be installed either horizontally or vertically and the head rotates 355°. Surface-mounted installation is straightforward as the driver is built into the casing, making it a favourite for both customers and contractors.

**Application:** Bedsides, reading nooks.

UKCA CE 3 YEARS IP20

<b>Wattage</b>	7.1W
<b>Lumen output</b>	413lm
<b>Beam angle</b>	15°
<b>IP rating</b>	IP20
<b>Voltage</b>	230-240V
<b>Warranty</b>	3 years
<b>Colour temp</b>	3000K
<b>Switch</b>	Rocker Switch
<b>Light source</b>	Integrated LED
<b>Driver included</b>	Integrated
<b>Dimmable</b>	No

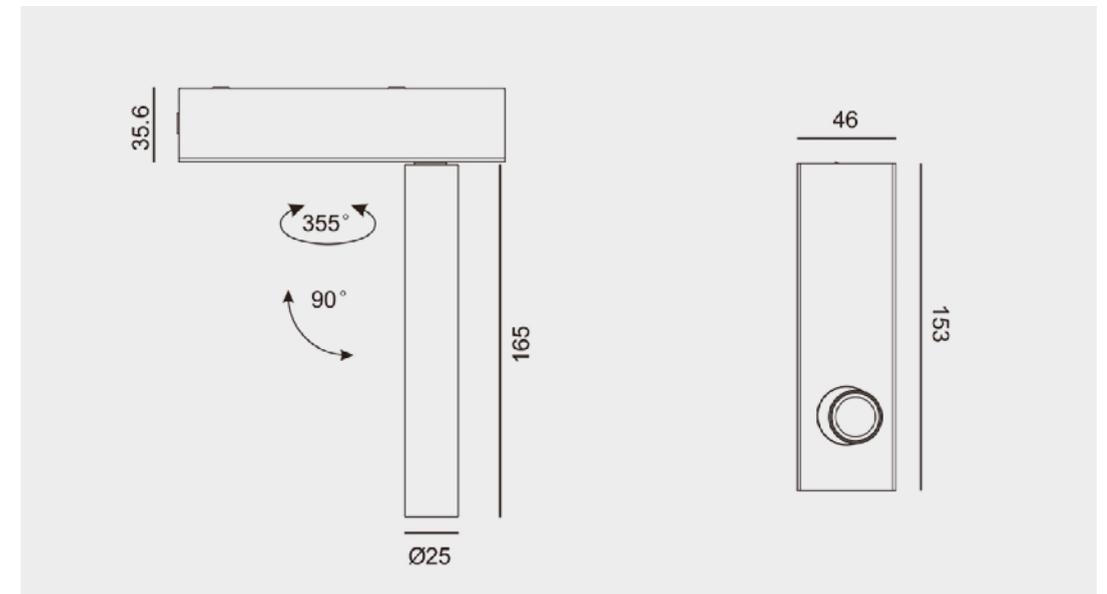

## Tatou

COLOUR

Black

CODE

3012391

# Step Lights




# Snow

This recessed light projects an asymmetric beam on the ground with no glare visible from above. Its IP54 rating means it can also be used in wet environments, like in a bathroom as a night light.

**Application:** Staircases, hallways, bathrooms, night light.

UKCA CE 3 YEARS IP54

<b>Wattage</b>	3.8W
<b>Voltage</b>	230V
<b>Lumen output</b>	151lm
<b>Cutout size</b>	70mm
<b>Colour temp</b>	3000K
<b>CRI</b>	80
<b>IP rating</b>	IP54
<b>Finish</b>	White
<b>Dimmable</b>	No
<b>Warranty</b>	3 years
<b>Light source</b>	Integrated LED
<b>Driver included</b>	Integrated

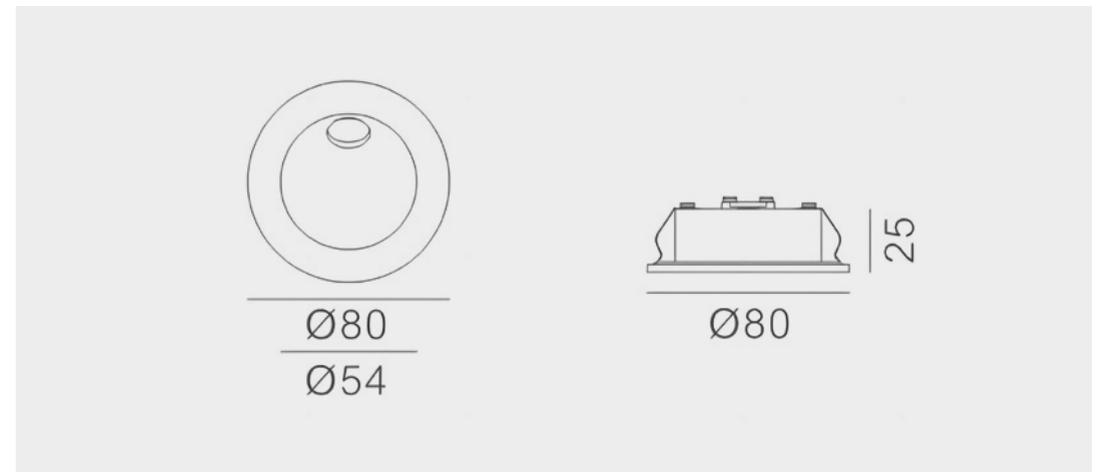

## Snow

COLOUR

White

CODE

3017047



# Proser

This clever fitting comes with two sensors built in: an integrated motion sensor, switching it on/off when movement is detected, and a light sensor, so that it's only activated when it's dark enough.

**Application:** Night light, staircases, corridors.

UKCA CE 5 YEARS IP20

**Wattage** 2.6W  
**Voltage** 230V  
**Lumen output** 15lm  
**Cutout size** 95 x 95mm  
**Colour temp** 3000K  
**CRI** 90  
**IP rating** IP20  
**Dimmable** No  
**Warranty** 5 years  
**Light source** Integrated LED  
**Driver included** Integrated

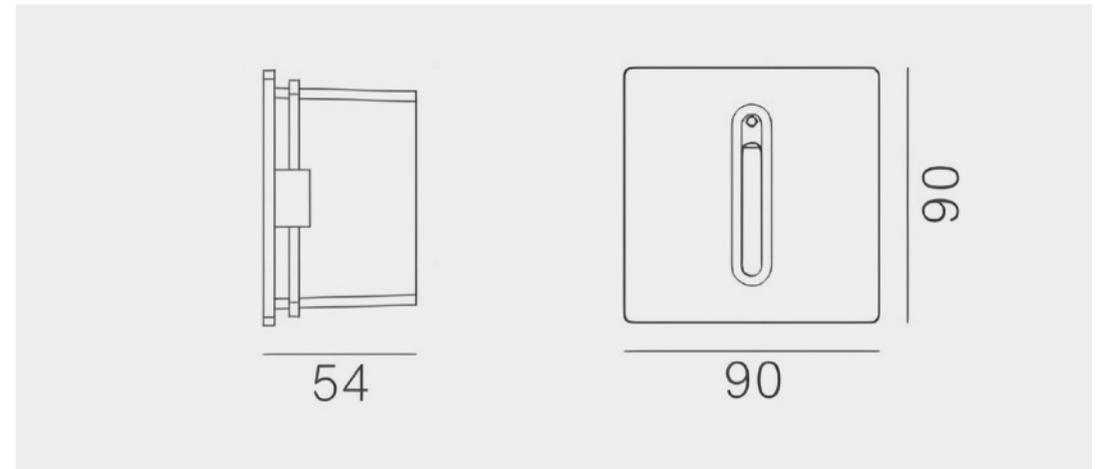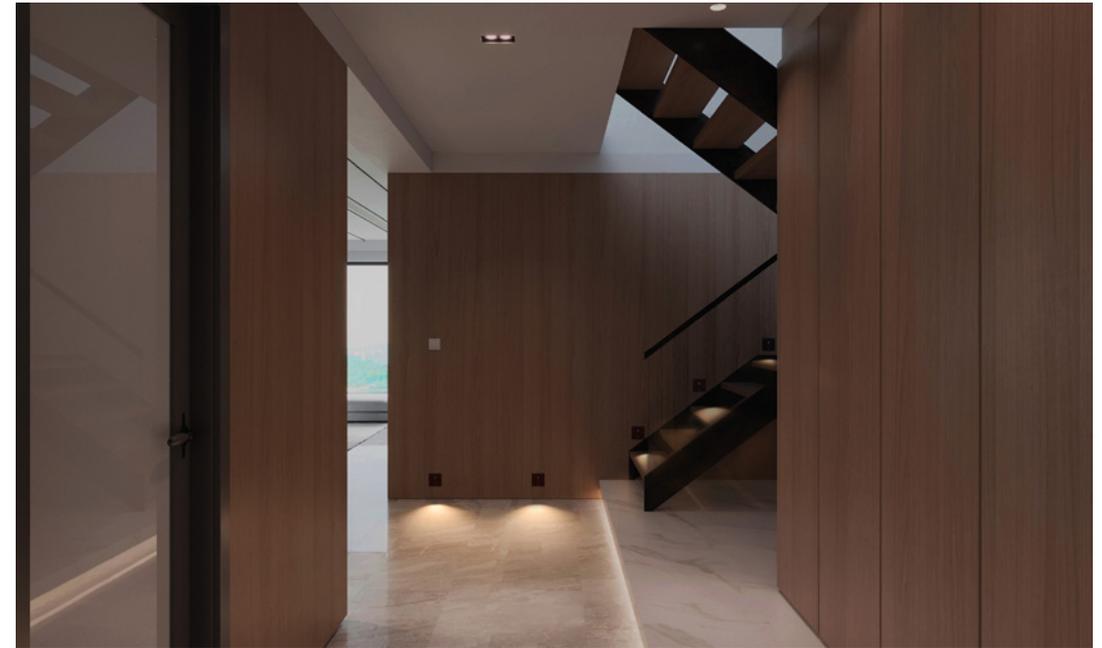

**Proser**

COLOUR	CODE
Black	3028691
White	3030097

# Card IN1



This simple, popular recessed steplight produces a triangular shaped light effect on the floor. Its driver is built into the back box - so installation is easy.

Suitable for both block and stud walls. Plaster-in kit included for optional use.

**Application:** Hallways, staircases.

<b>Wattage</b>	4W
<b>Voltage</b>	230V
<b>Lumen output</b>	80lm
<b>Cutout size</b>	63 x 27mm
<b>CRI</b>	80
<b>IP rating</b>	IP20
<b>Finish</b>	White/Black
<b>Dimmable</b>	No
<b>Warranty</b>	5 years
<b>Light source</b>	Integrated LED
<b>Driver included</b>	Integrated

- UKCA
- CE
- 5 YEARS
- IP20

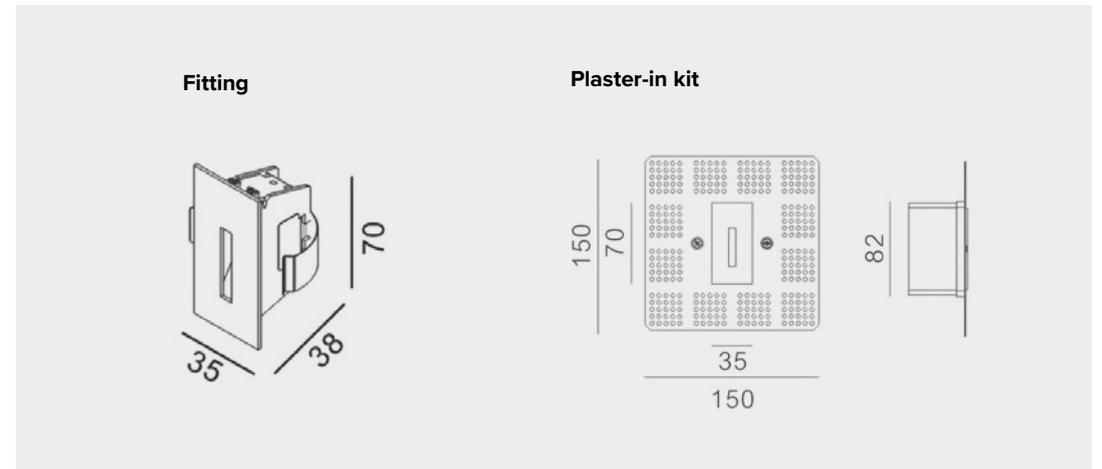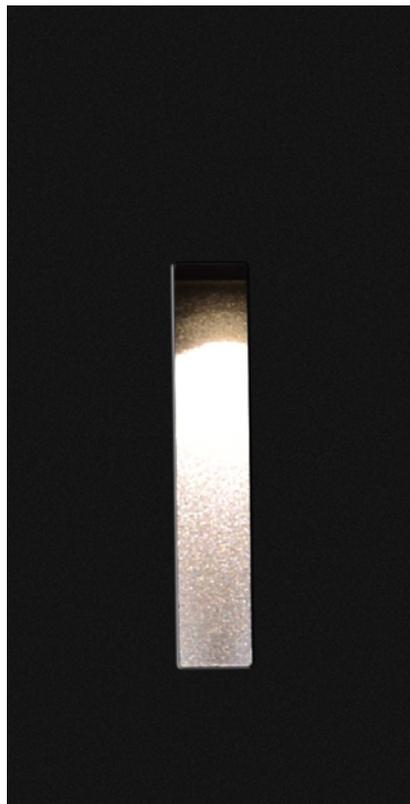

## Card IN1

COLOUR	COLOUR TEMP	CODE
White	3000K	3014146
Black	3000K	3018837
Black	2700K	3021810

# Card IN2


The elongated version of the classic Card IN1 produces a long, narrow beam. It may appear that the bigger size would turn the fitting into a feature but it remains discreet, elegant and low-glare.

Suitable for both block and stud walls. Plaster-in kit included for optional use.

**Application:** Hallways, staircases.

<b>Wattage</b>	4W
<b>Lumen output</b>	75lm
<b>Cutout size</b>	165 x 30mm
<b>Colour temp</b>	3000K
<b>CRI</b>	80
<b>IP rating</b>	IP20
<b>Finish</b>	White
<b>Dimmable</b>	No
<b>Warranty</b>	5 years
<b>Light source</b>	Integrated LED
<b>Driver included</b>	Integrated

UKCA CE 5 YEARS IP20

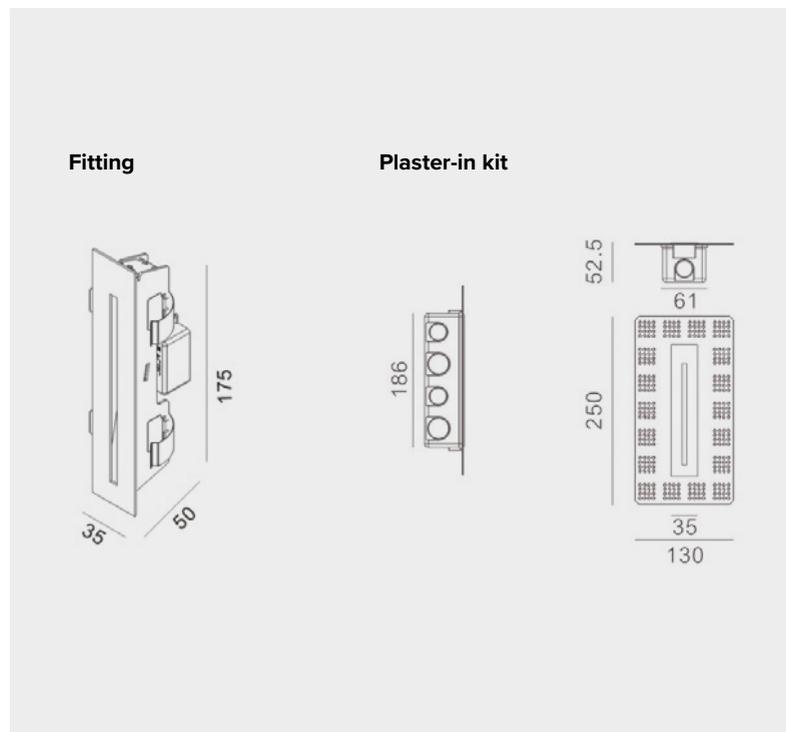

## Card IN2

COLOUR	CODE
White	3017048


# Slide

This modern take on a classic step light allows for a traditional feel with all the functionality of an LED source. It has an integrated driver to allow for easy installation and can be plastered in for a seamless look.

**Application:** Guidance light, corridors, night light.

<b>Wattage</b>	5.1W
<b>Lumen output</b>	90lm
<b>IP rating</b>	IP20
<b>Finish</b>	White
<b>Material</b>	Aluminium
<b>Dimmable</b>	No
<b>Size</b>	70*70*40
<b>Warranty</b>	5 years
<b>Colour temp</b>	3000K
<b>Light source</b>	Integrated LED
<b>Driver included</b>	Integrated

UKCA CE 5 YEARS IP20

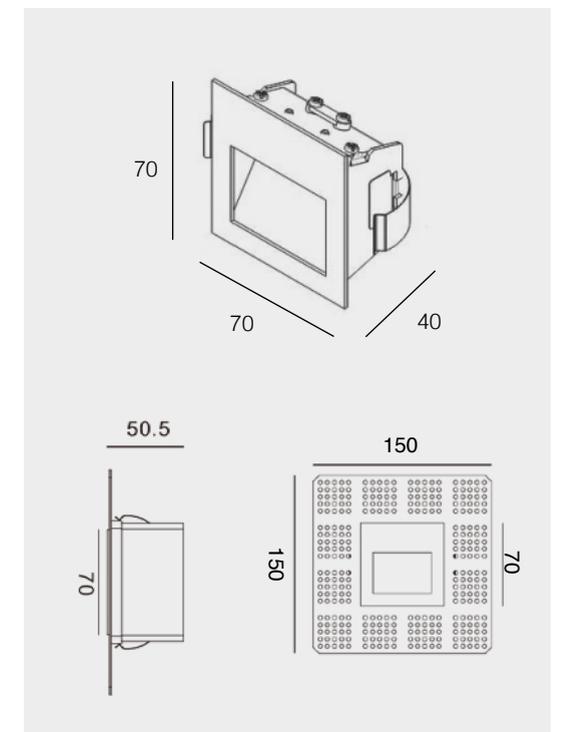

## Slide

COLOUR	CODE
White	3022298

# Exterior Lights



# Pictor

Flexible, elegant and versatile: this collection of outdoor spotlights is designed to suit a myriad of landscapes. Their heads can be rotated vertically and horizontally. All models are provided with both a ground spike and surface mounting base.


**Application:** Walkways, trees, sculptures.

<b>Material</b>	Aluminum
<b>Finish</b>	Grey
<b>IP rating</b>	IP65
<b>Voltage</b>	100-240V
<b>Warranty</b>	3 years
<b>Colour temp</b>	2700K
<b>Light source</b>	Integrated LED
<b>Driver included</b>	Integrated
<b>Dimmable</b>	No

- UKCA
- CE
- 3 YEARS
- IP65
- LDT




SS

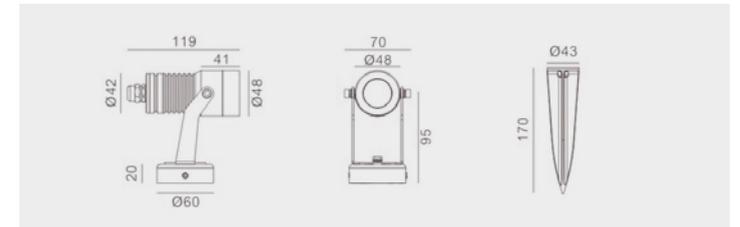


S



M

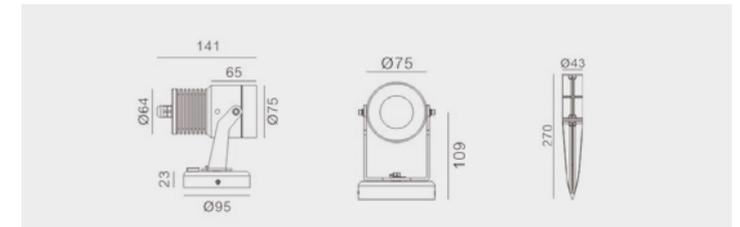

L

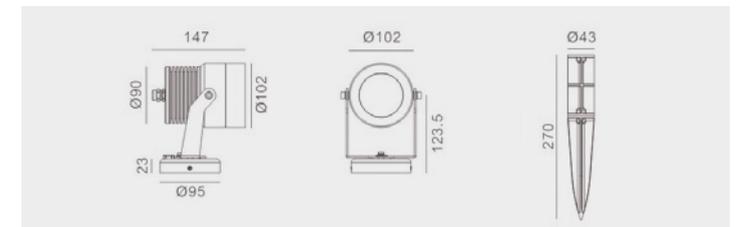

**Pictor**

SIZE	WATTAGE	LUMEN OUTPUT	BEAM ANGLE	CODE
SS	4.2W	319lm	28°	3019994
S	7.8W	545lm	40°	3019870
M	14W	962lm	34°	3019995
L	26W	2191lm	36°	3019996



# Eternity

Add warmth to your outdoor spaces with this range. A minimal discrete design that projects downwards to add layers of light without any glare.

**Application:** Walkways, gardens, patios.

UKCA CE 2 YEARS IP65

**Wattage** 11W  
**Lumen output** 330lm  
**Material** Aluminium  
**Finish** Sandy Dark Grey  
**IP rating** IP65  
**Input voltage** 100-240V  
**Warranty** 2 years  
**Colour temp** 3000K  
**Light source** Integrated LED  
**Driver included** Integrated  
**Dimmable** No

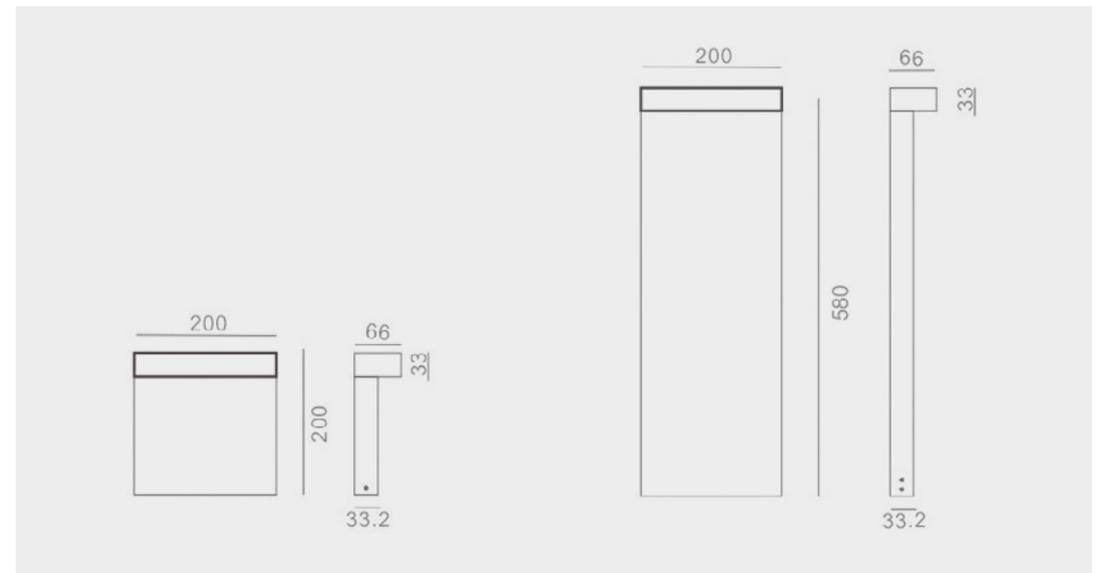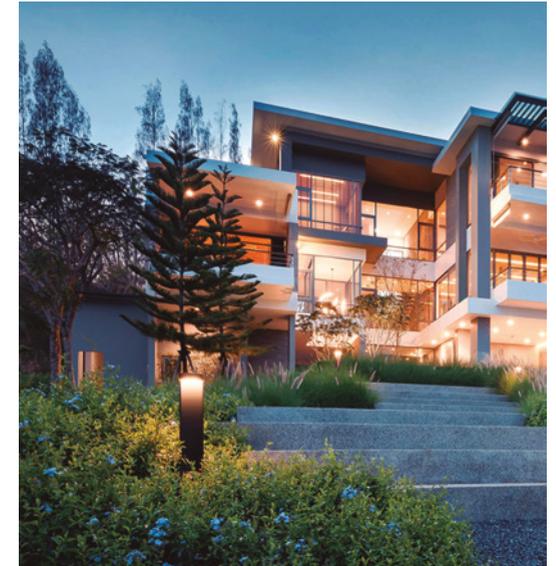

**Eternity**

HEIGHT	CODE
200 mm	3034881
600 mm	3034880


# Way

A simple, elegant bollard, with a conical reflector that provides 360 degrees of softly diffused light. A perfect glow for outdoor spaces.

**Application:** Driveways, walkways, gardens.

UKCA CE 3 YEARS IP65

<b>Wattage</b>	7.7W
<b>Lumen output</b>	291lm
<b>Material</b>	Aluminium
<b>Finish</b>	Sandy Black
<b>IP rating</b>	IP65
<b>Input voltage</b>	100-240V
<b>Warranty</b>	3 Years
<b>Colour temp</b>	3000K
<b>Light source</b>	Integrated LED
<b>Driver included</b>	Integrated
<b>Dimmable</b>	No

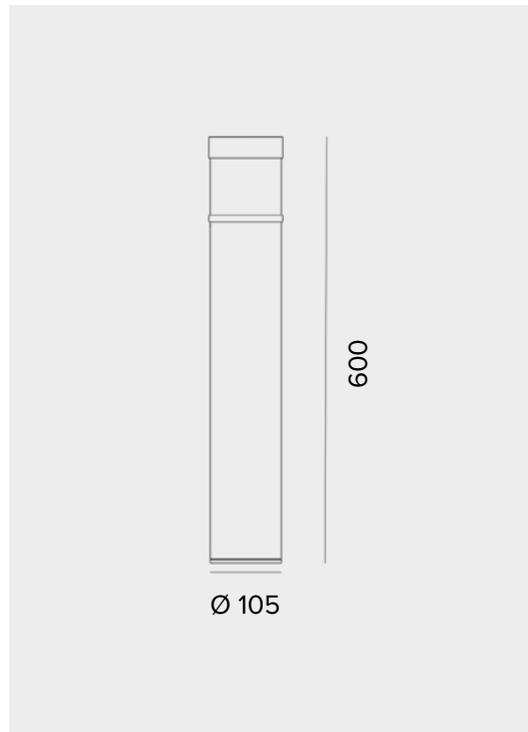

## Way

PRODUCT	CODE
Sandy Black	3034882


# Giano

A compact, outdoor uplighter with cleverly designed optics to control where the light is projected. Made to last with 316 Stainless Steel and IP67 protection. It comes with a built in driver and outer casing for easy installation.

**Application:** Walkways, exterior walls, architectural features.

UKCA CE 3 YEARS IP67

<b>Wattage</b>	4W
<b>CRI</b>	90
<b>Optics</b>	7°-27°
<b>Lumen output</b>	98lm
<b>Cutout hole size</b>	75mm
<b>Warranty</b>	3 years
<b>Colour temp</b>	2700K
<b>Light source</b>	Integrated LED
<b>Driver included</b>	Integrated
<b>Dimmable</b>	No

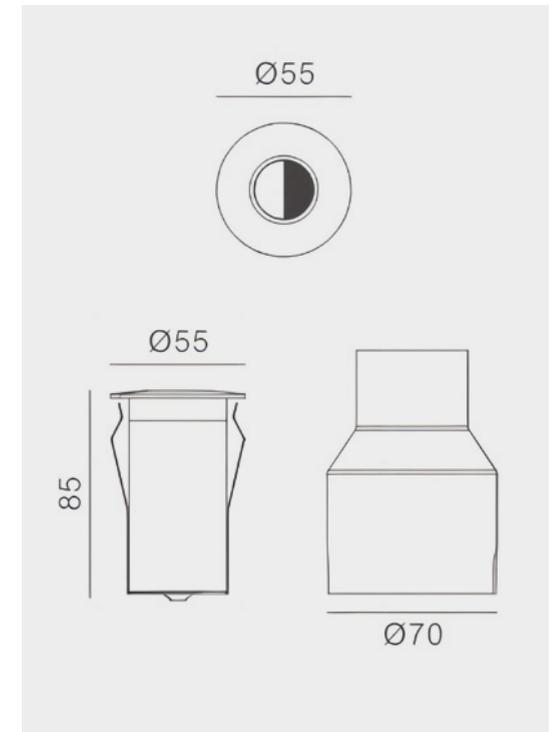

## Giano

PRODUCT	CODE
Stainless Steel	3018870

# Dimming Systems




# Lutron RA2 Select

UKCA CE 2 YEARS

## Simple retrofit solutions


This simple, accessible dimming system from Lutron allows users to save energy and gain control of their home. The system is easily installed into ceiling voids, the controls require no re-wiring, and batteries will last up to 10 years. Once in place, all setup, control, and monitoring conveniently happens via the Lutron App. More options and information can be provided by our team.

**Application:** Residential

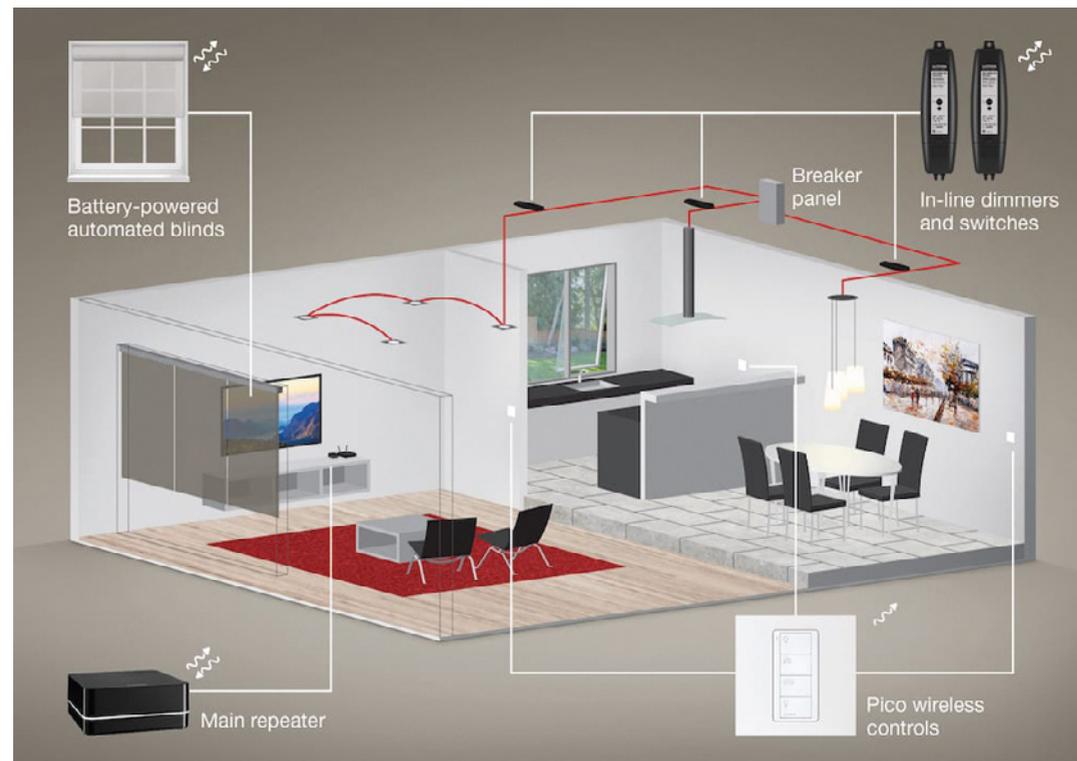

## So, why choose RA2 Select?

1. Simple: App-based setup, control, and monitoring; no training or PC required.
2. Reliable: RA2 Select is 100% end of line tested before it leaves Lutron facilities.
3. Easy to Install: No cutting of holes or running of wire is needed. The automatic programming means it's set up and good to go in a single visit.
4. Affordable: The easy installation significantly reduces on-site costs and the components are competitively priced against alternatives.

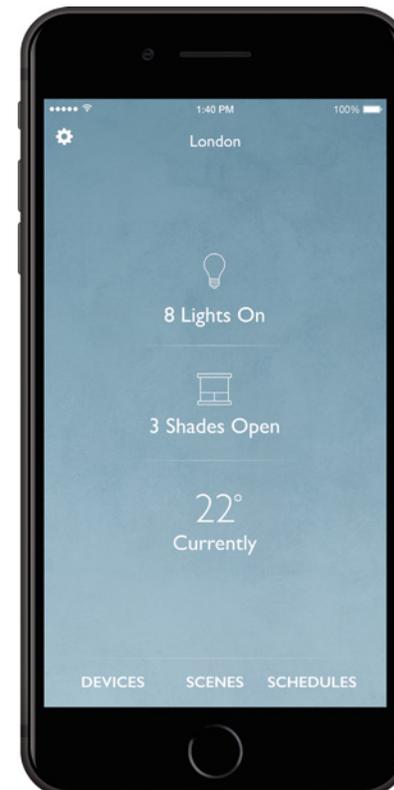

# Lutron RA2 Select

UKCA CE 2 YEARS

## Repeaters

### Main Repeater

Allows for setup, control and monitoring of system. Requires connection to home Wifi via ethernet cable.


CODE 3018106



### Signal Repeater

Extends range of main repeater. Up to 4 can be used on single system.

CODE 3018877

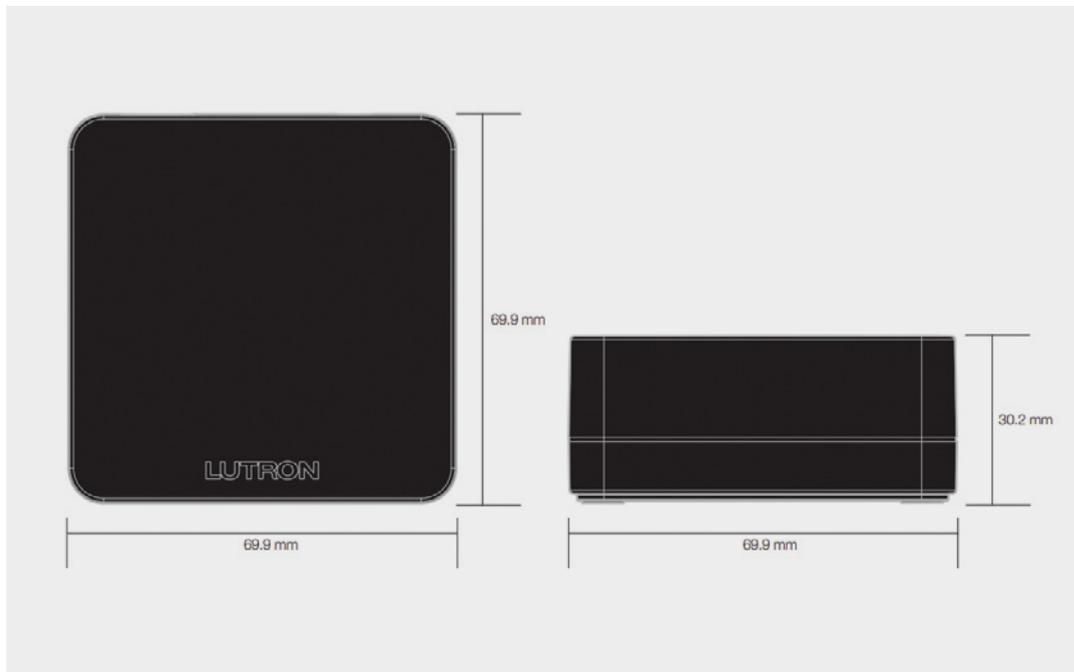


## Dimmers and Switches

### In-Line Phase Dimmer

Wireless inline mains dimming module (trailing edge only). Controls up to 150W of LED lighting.


CODE 3018107

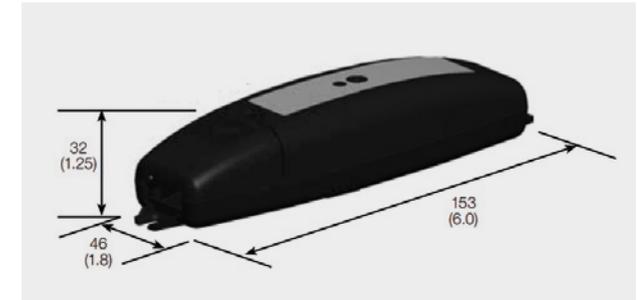

### In-Line Switch

Wireless Inline switch module (non dimmable). Controls up to 150W of LED lighting.


CODE 3018108

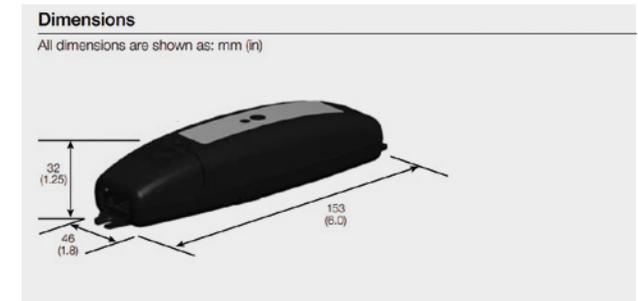

### 0-10V Dimmer

Wireless 0-10V dimmer module. Requires additional 2-core control cable between dimmer and light.

CODE 3020145

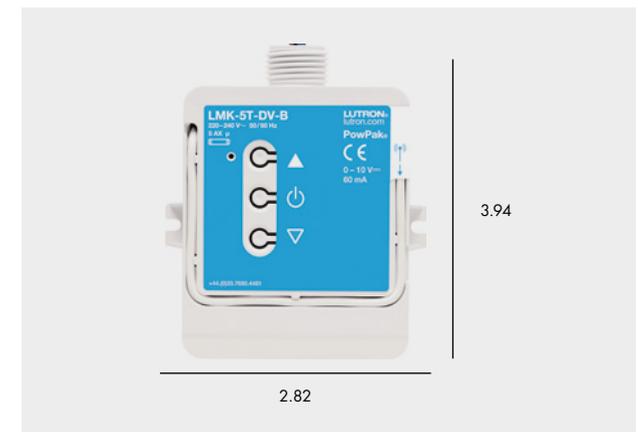

# Lutron RA2 Select

UKCA CE 2 YEARS

## Keypads

### Zone Pico Keypad

The wireless Pico 3-button keypad with raise/lower function can be used to control a single zone.



Black	3021012
White	3018520

### Scene Pico Keypad

The wireless Pico 4-button scene controller. This keypad controls 3 scenes with a 4th off button.



Black	3035444
White	3027559

## Keypad Faceplates

### Single Gang Faceplate


Plastic faceplate for mounting 1 Pico keypad. It is designed to fit onto a standard single back box or be secured directly to wall.



Black	3018741
White	3018525

### Double Gang Faceplate

Plastic faceplate for mounting 2 Pico keypads. It is designed to fit onto a standard single back box or be secured directly to wall.

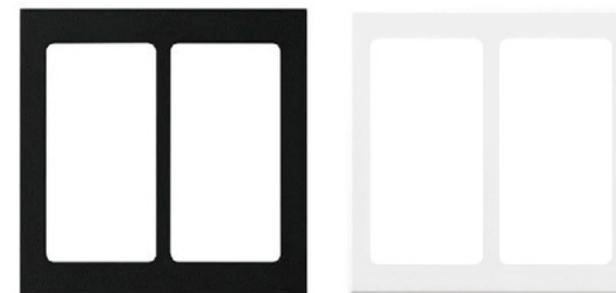

Black	3021070
White	3019592

# Lutron Vive

UKCA CE 2 YEARS

This simple, scalable, wireless lighting control system helps make both new and existing commercial buildings efficient, comfortable and productive.

Vive is easy to specify, install, and update so projects are completed faster and within budget. The installation time is up to 70% faster than wired control solutions, which results in shorter timelines and lower costs.

More options and information can be provided by our team

**Application:** Commercial

## Components

### DALI dimmer

Controls 32 DALI devices



CODE 3018751

### Sensor Wireless

Battery powered sensor  
Wall mounted



CODE 3020734

### Wireless Hub



CODE 3019589

### Phase Dimmer

Dims up to 150W LED




CODE 3023968

### Pico Keypad

4-button scene controller



CODE 3019603

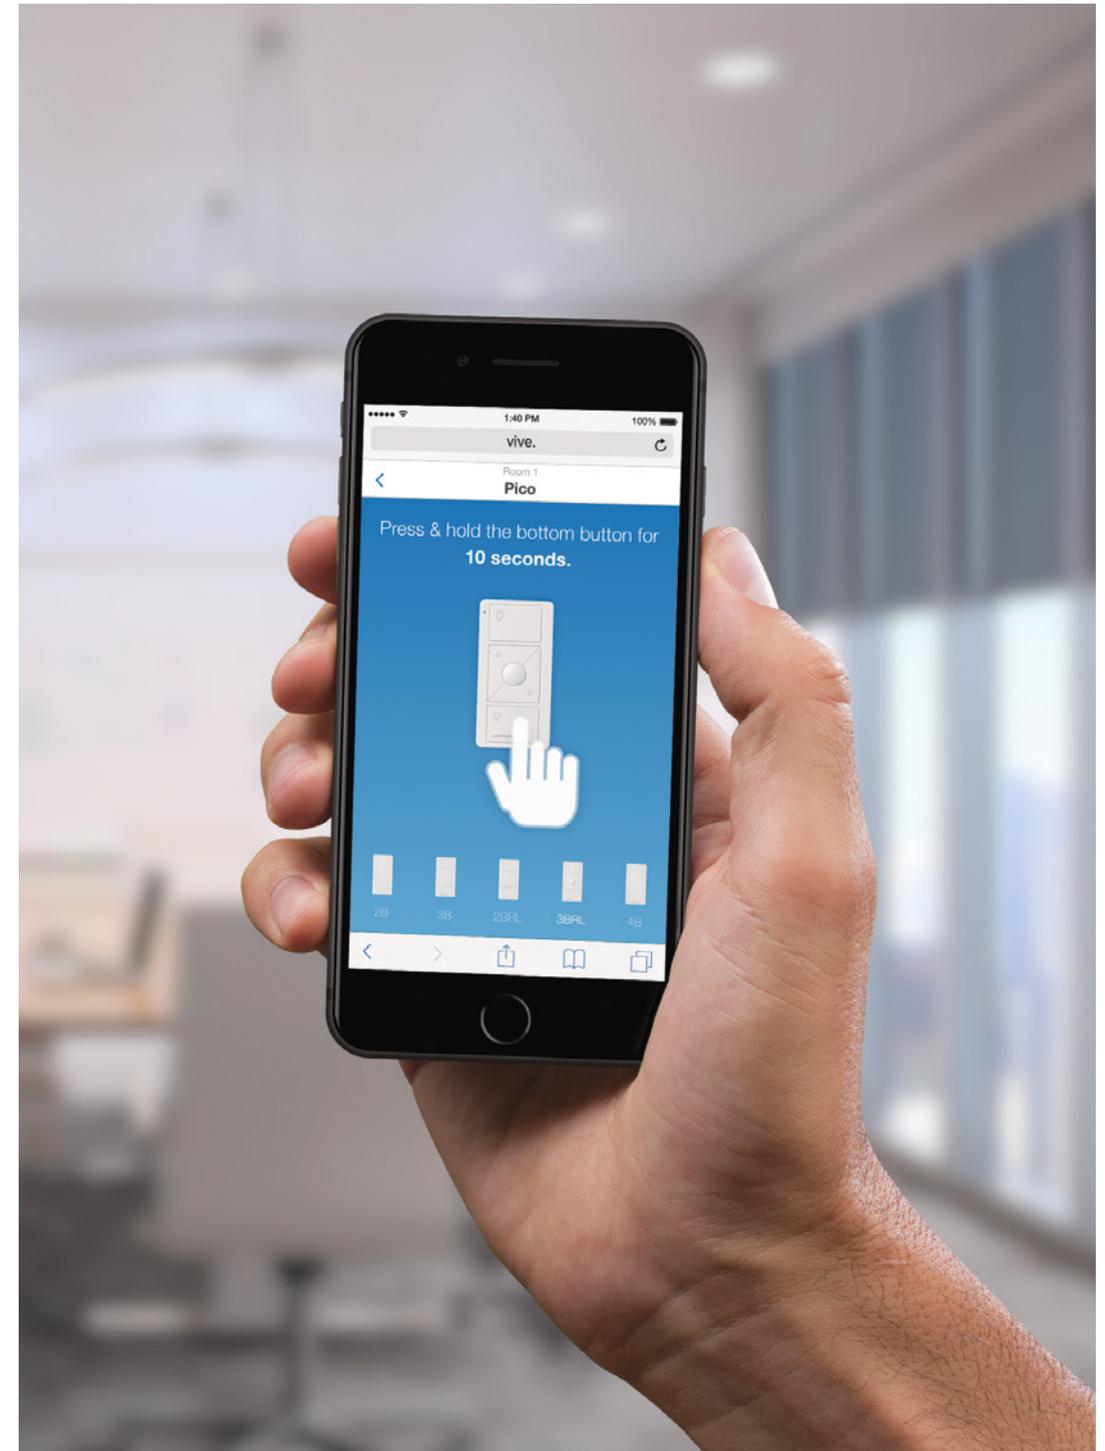

# Accessories

The Engine Room, Belfast.



# Constant Voltage Drivers

UKCA CE 5 YEARS

VOLTAGE	WATTAGE	CURRENT	DIMMING	IP RATING	DIMENSIONS (MM)	CODE
24V	60W	2.5A	Non-Dim	IP20	200l x 40w x 31h	3037087
24V	75W	3.13A	Phase Dim	IP20	110l x 76w x 30h	3037078 + 3037079
24V	150W	6.25A	Phase Dim	IP20	170l x 76w x 30h	3037080 + 3037081
24V	60W	2.5A	1-10V Dim	IP66	208l x 43w x 26h	3037082
24V	100W	4.1A	1-10V Dim	IP66/IP67	240l x 50w x 34h	3037083
24V	250W	10A	1-10V Dim	IP66/IP67	265l x 68w x 40h	3037084
24V	80W	3.3A	DALI	IP20	346l x 32w x 22h	3037085
24V	160W	6.67A	DALI	IP20	300l x 50w x 35h	3037086
48V	100W	4.2A	Non-Dim	IP67	190l x 52w x 37h	3015923
48V	150W	6.25A	Non-Dim	IP67	256l x 78w x 47h	3024822

# Constant Current Drivers

UKCA CE 5 YEARS

WATTAGE	CURRENT	VOLTAGE RANGE	DIMMING	IP RATING	DIMENSIONS (MM)	CODE
14W	200-350mA	27-40V	Phase	IP20	130L x 30W x 22H	3037088
20W	200-500mA	20-50V	DALI	IP20	204	3037089

# LED Engine

Key Features:

Precise optical control and free from multi-shadow issue.

Replaceable front cover to maximize optics flexibility and future extension.


Dual mode options in High-Output (HO) and High-Efficacy (HE).

Alternative beam angles and colour temperatures, including tunable white available upon request.

**High flux output** up to 1500 lm  
**Beam angle** 40°  
**Type of protection** IP20  
**Diameter** 50mm  
**Height** 55mm  
**Warranty\*** 7 Years  
**Driver included** No

\*When used with recommended driver

UKCA CE 7 YEARS IP20 TM30 COMPLIANT LDT

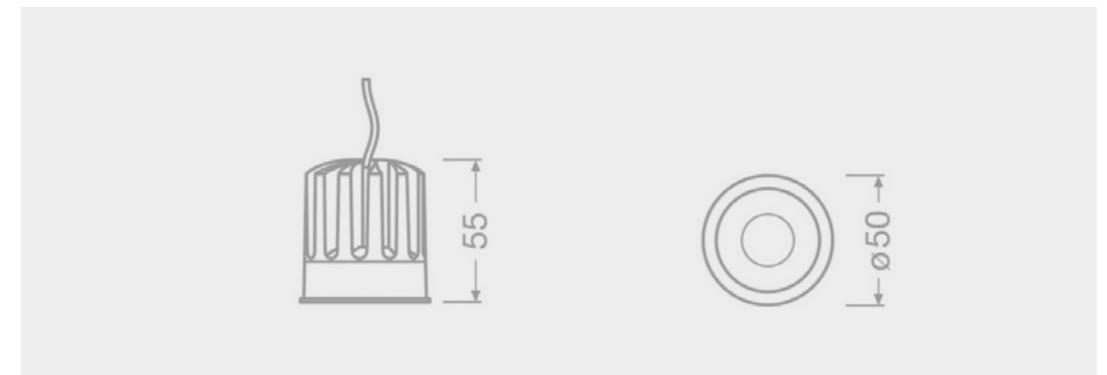

PRODUCT	CODE
Ambient White 2700K	3034889
Warm White 3000K	3034887
Cool White 4000K	3034891
Dim to Warm 2700K - 1800K	3035017

# Professional Lamps

UKCA CE 3 YEARS

## GLS

**Dimmable** Yes  
**Shape** GLS  
**Lamp cap** E27  
**Wattage** 7W  
**Lumen output** 806lm  
**Colour temperature** 2700K  
**CRI** 80  
**Size** 106 h x 60 dia  
**Lifespan** 15,000 hours



PRODUCT	CODE
Clear	3037091
Frosted	3034898

## Capsule

**Dimmable** Yes  
**Shape** Capsule  
**Wattage** 3W  
**Lumen output** 320lm  
**Colour temperature** 2700K  
**Size** 52 h x 16 dia



PRODUCT	CODE
G9	3037093

## Candle

**Dimmable** Yes  
**Shape** Candle  
**Lamp cap** E14  
**Wattage** 4.8W  
**Lumen output** 470lm  
**Colour temperature** 2700K



PRODUCT	CODE
Clear	3034893
Frosted	3034894

## Golfball

**Dimmable** Yes  
**Shape** Golf Ball  
**Wattage** 4.8W  
**Lumen output** 470lm  
**Colour temperature** 2700K  
**CRI** 80  
**Size** 77 h x 45 dia  
**Lifespan** 15,000 hours



PRODUCT	CODE
E27	3037092

## ACCESSORIES

### PAR16

<b>Dimmable</b>	Yes
<b>Shape</b>	PAR16
<b>Lamp cap</b>	GU10
<b>Wattage</b>	8.3W
<b>Lumen output</b>	575lm
<b>Glass type</b>	Clear
<b>Size</b>	52 h x 50 dia
<b>Lifespan</b>	25,000 hours
<b>Beam angle</b>	36°
<b>CRI</b>	90



PRODUCT	CODE
2700K	3034895
3000K	3034896

#### Disclaimer

All product sizes quoted within this publication are for informative purposes and can be subject to change due to product upgrade. Do not cut any holes until stock is confirmed and a sample approved on site.

#### Copyright

LightingEnterprises.com Ltd 2023

# MAKE LIGHT WORK

LIGHTSOURCE

[www.lightsource.co.uk](http://www.lightsource.co.uk)

The Engine Room,  
Portview Trade Centre,  
310 Newtownards Road,  
BT4 1HE,  
United Kingdom

📍 thelightsource  
📧 thelightsourceuk  
✉ YourLightSource  
📱 theLightsource

[sales@thelightsource.co.uk](mailto:sales@thelightsource.co.uk)  
+44 (0)28 90 666 615